


.100	Header	Triple Row	Rt Angle	Thru Hole
------	--------	------------	----------	-----------

.100 inch Center - .025 inch Square Pin - Triple Row Right Angle Header

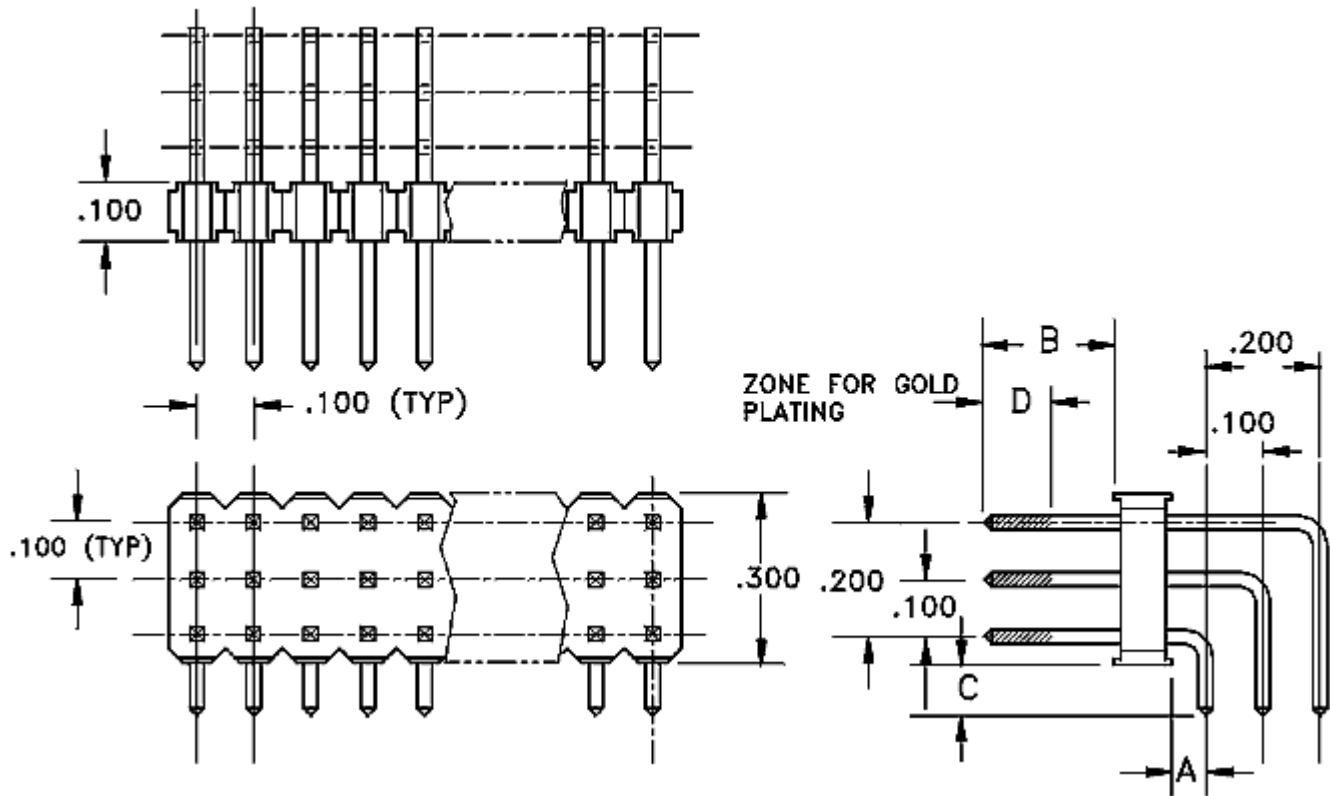

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
4901R	1.52	0.060	5.84	0.230	2.79	0.110	5.84	0.230			G2 : G1 : T	3-120
4905R	1.52	0.060	8.08	0.318	3.30	0.130	6.10	0.240			G2 : G1 : T	3-120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com