


Use this browser's print function to print this entire page, then close this window.

Catalog Page 10A-2

High Temperature Compatible

.100"	Header	Parallel Board Connection	U Shaped	Thru Hole
-------	--------	---------------------------	----------	-----------

Provides parallel boards connection - use for joining boards of different # of layers

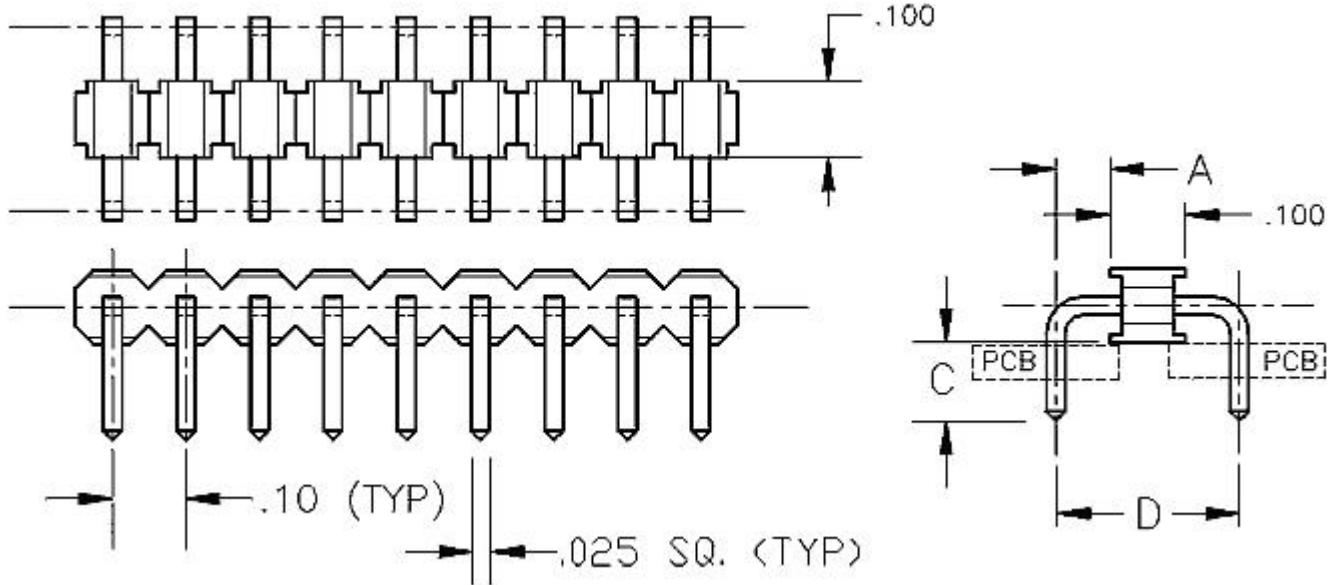

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
5610	1.90	0.075			3.30	0.130	6.35	0.250			T	2-40
5611	2.54	0.100			3.30	0.130	7.62	0.300			T	2-40

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .025" sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: info@commcon.com