


.100	Header	.100 x .200	Straight	Thru Hole
------	--------	-------------	----------	-----------

.100 inch Center - .025 inch Square Pin - .100 x .200 Double Row Straight Header

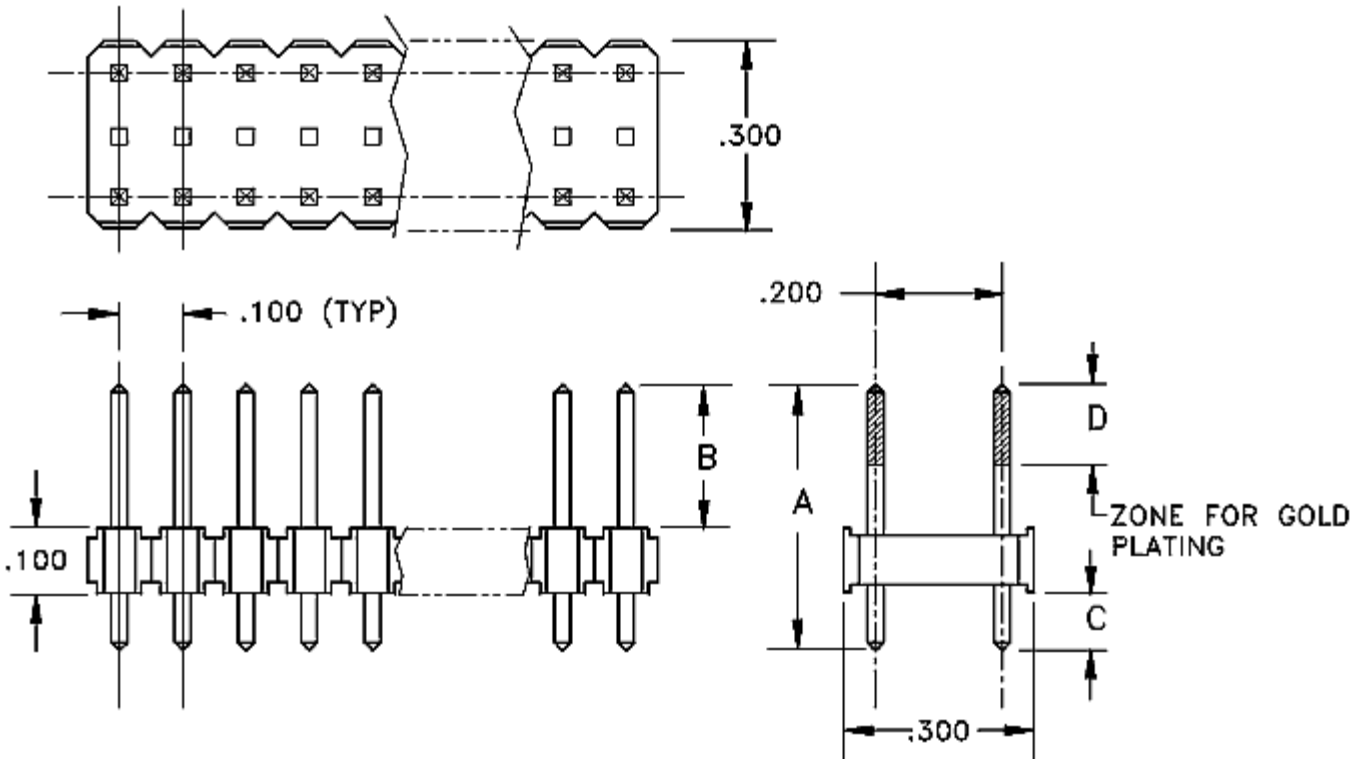

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3600S	8.38	0.330	2.92	0.115	2.92	0.115	2.92	0.115			G2 : T	2-80
3602S	11.56	0.455	5.97	0.235	3.05	0.120	5.97	0.235			G2 : G1 : T	2-80
3604S	13.59	0.535	8.08	0.318	2.92	0.115	7.87	0.310			G2 : G1 : T	2-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com