



Use this browser's print function to print this entire page, then close this window.

Catalog Page 12-1

Hi Temperature Plastic

.100"	Header	Single Row - Stacking	Straight	Thru Hole
-------	--------	-----------------------	----------	-----------

.100" Center, .025" Square Pin, Board Stacking, Single Row Straight Header

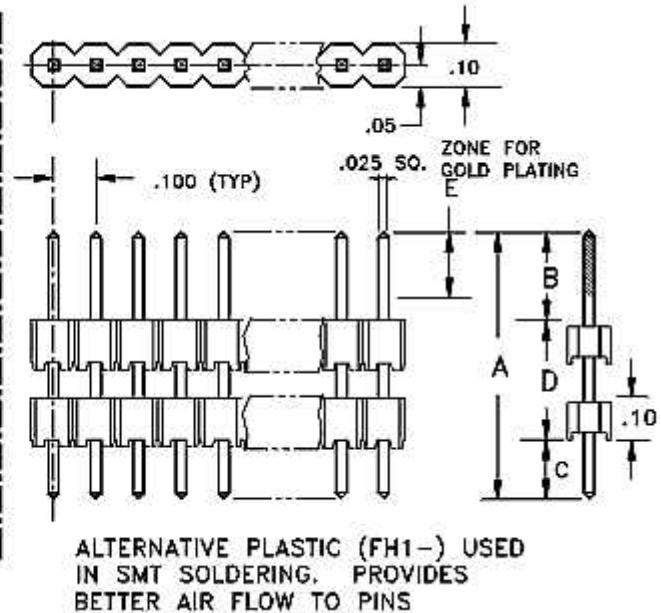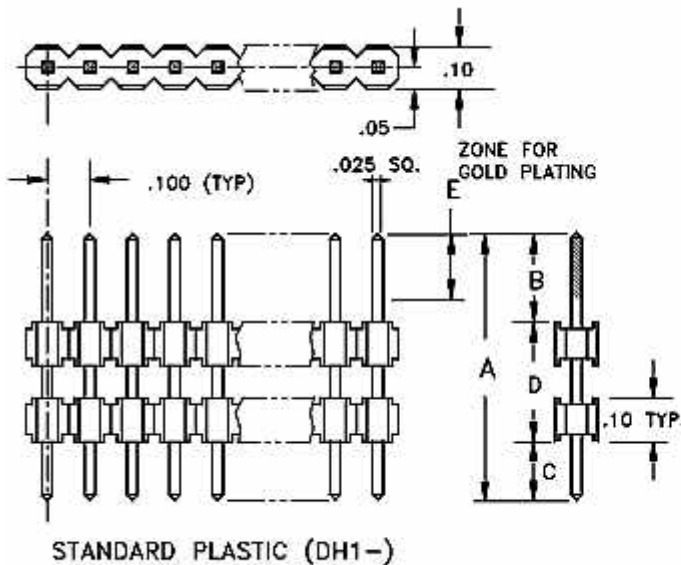

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
DH1-235/200/100 FH1-235/200/100	13.59	0.535	5.97	0.235	2.54	0.100	5.08	0.200	5.84	0.230	G2 : G1 : T	2-40
DH1-235/300/100 FH1-235/300/100	16.13	0.635	5.97	0.235	2.54	0.100	7.62	0.300	5.84	0.230	G2 : G1 : T	2-40
DH1-235/400/100 FH1-235/400/100	18.67	0.735	5.97	0.235	2.54	0.100	10.16	0.400	5.84	0.230	G2 : G1 : T	2-40
DH1-235/500/100 FH1-235/500/100	21.21	0.835	5.97	0.235	2.54	0.100	12.70	0.500	5.84	0.230	G2 : G1 : T	2-40
DH1-235/370/230 FH1-235/370/230	21.21	0.835	5.97	0.235	5.84	0.230	9.40	0.370	5.84	0.230	G2 : G1 : T	2-40
DH1-235/600/100 FH1-235/600/100	23.75	0.935	5.97	0.235	2.54	0.100	15.24	0.600	5.84	0.230	G2 : G1 : T	2-40
DH1-235/470/230 FH1-235/470/230	23.75	0.935	5.97	0.235	5.84	0.230	11.94	0.470	5.84	0.230	G2 : G1 : T	2-40
DH1-235/700/100 FH1-235/700/100	26.29	1.035	5.97	0.235	2.54	0.100	17.78	0.700	5.84	0.230	G2 : G1 : T	2-40
DH1-235/570/230 FH1-235/570/230	26.29	1.035	5.97	0.235	5.84	0.230	14.48	0.570	5.84	0.230	G2 : G1 : T	2-40
DH1-235/800/100 FH1-235/800/100	28.83	1.135	5.97	0.235	2.54	0.100	20.32	0.800	5.84	0.230	G2 : G1 : T	2-40
DH1-235/770/230 FH1-235/770/230	31.37	1.235	5.97	0.235	5.84	0.230	19.56	0.770	5.84	0.230	G2 : G1 : T	2-40

DH1-235/900/100 FH1-235/900/100	31.37	1.235	5.97	0.235	2.54	0.100	22.86	0.900	5.84	0.230	G2 : G1 : T	2-40
DH1-235/1000/100 FH1-235/1000/100	33.91	1.335	5.97	0.235	2.54	0.100	25.40	1.000	5.84	0.230	G2 : G1 : T	2-40
DH1-235/1100/100 FH1-235/1100/100	36.45	1.435	5.97	0.235	2.54	0.100	27.94	1.100	5.84	0.230	G2 : G1 : T	2-40
DH1-235/970/230 FH1-235/970/230	36.45	1.435	5.97	0.235	5.84	0.230	24.64	0.970	5.84	0.230	G2 : G1 : T	2-40
DH1-235/1300/100 FH1-235/1300/100	41.53	1.635	5.97	0.235	2.54	0.100	33.02	1.300	5.84	0.230	G2 : G1 : T	2-40
DH1-235/1400/100 FH1-235/1400/100	44.07	1.735	5.97	0.235	2.54	0.100	35.56	1.400	5.84	0.230	T	2-40

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .025" sq pin, burr free both ends
Insulate Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Temperature Range:	-65—C to +250—C
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temperature:	250—C for 60 seconds
Heat Deflection:	260—C @ 264 PSI per ASTM D648

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: info@commcon.com