


.100	HDD	40 signal + 8 shunt + 4 power - for Maxtor drives	Right Angle	for Maxtor
------	-----	---	-------------	------------

ATA HDD Conn: 40 Signal + 8 shunt + 4 Power - Right Angle - for Maxtor

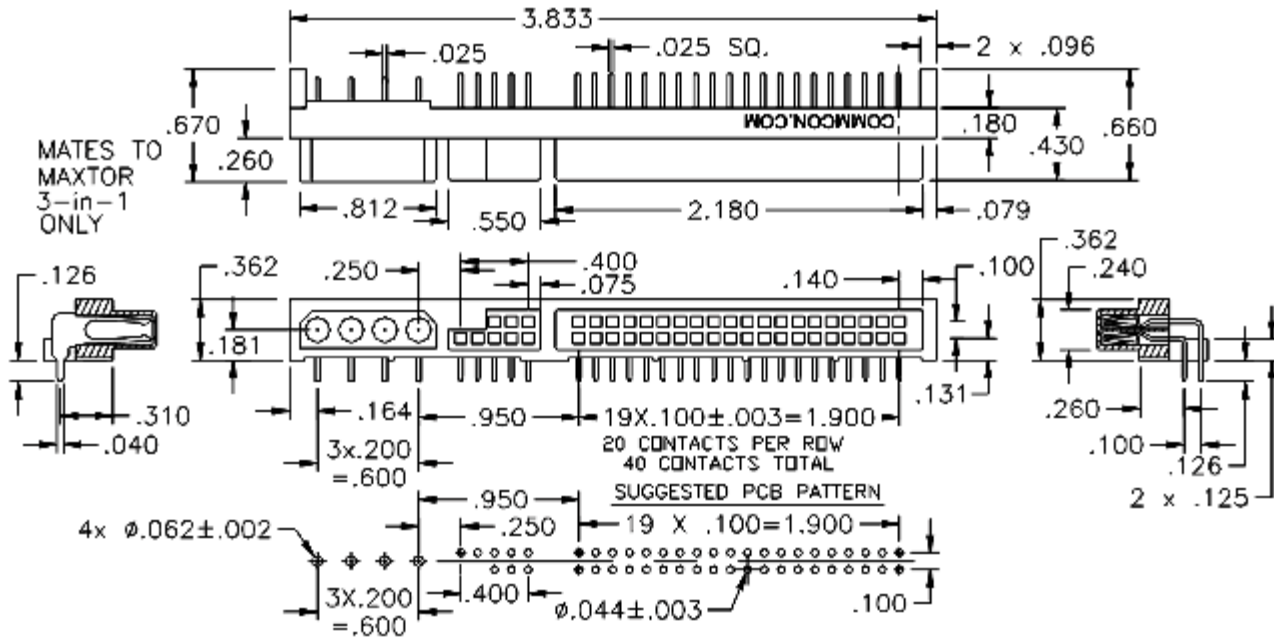

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>7631</b> Maxtor w shunts											X	One Per

Technical Notes	
<b>Mates with Drives from:</b>	Original Maxtor version (previous Quantum drives will not mate)
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Insertion Force - total:</b>	11 pounds (5.0 Kg) total
<b>Extraction Force - total:</b>	6.8 pounds (3.0 Kg)
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)