


.100	HDD	40 Female + 4 Female Power	Straight	
------	-----	----------------------------	----------	--

Disk Drive IDE Combo Conn: 40 Female + 4 Female Power - Straight

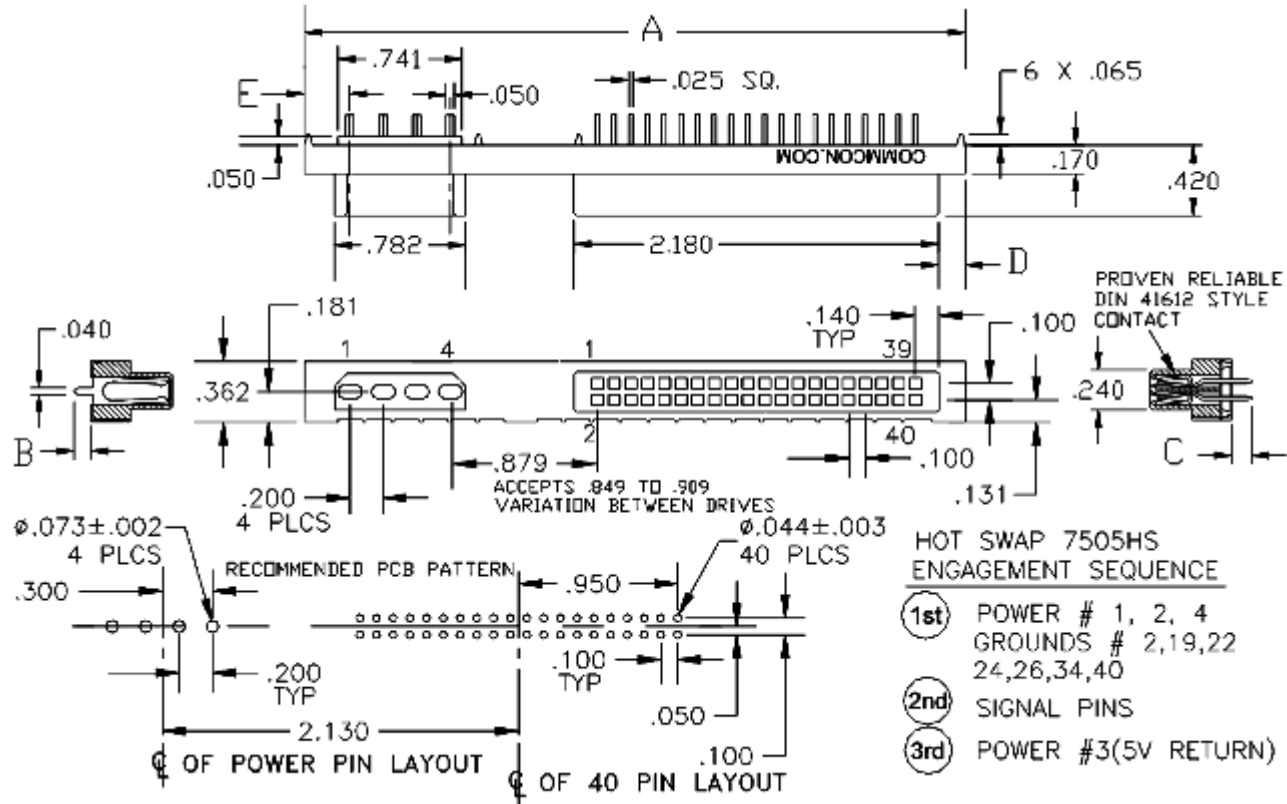

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7603	95.00	3.740	3.18	0.125	3.05	0.120	1.40	0.055	4.27	0.168	X	One Per
7505	100.33	3.950	3.18	0.125	3.05	0.120	4.06	0.160	6.88	0.271	X	One Per
7505HS Hot Swap	100.33	3.950	3.18	0.125	3.05	0.120	4.06	0.160	6.88	0.271	X	One Per
7503	100.33	3.950	2.54	0.100	3.05	0.120	4.06	0.160	6.88	0.271	X	One Per

Technical Notes	
Mates with Drives from:	Seagate - IBM - Quantum (see Maxtor model list)- Fujitsu - Samsung
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Insulation Resistance:	5000 MegOhm @ 500VDC
Insertion Force - total:	11 pounds (5.0 Kg) total
Extraction Force - total:	6.8 pounds (3.0 Kg)
Max Processing Temp:	250°C for 60 seconds
Plating:	Power = tin Signal = G2 (tin/gold)

**Plastic:**

High Temperature Compatible

***COMM CON CONNECTORS INC.***

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)