


.100	HDD	68 Male + 12 Female + 4 Female Power	Straddle Mount	Low Cost
------	-----	--------------------------------------	----------------	----------

Disk Drive Wide SCSI Combo: 68 male + 12 Female + 4 Female Power - Straddle Mount

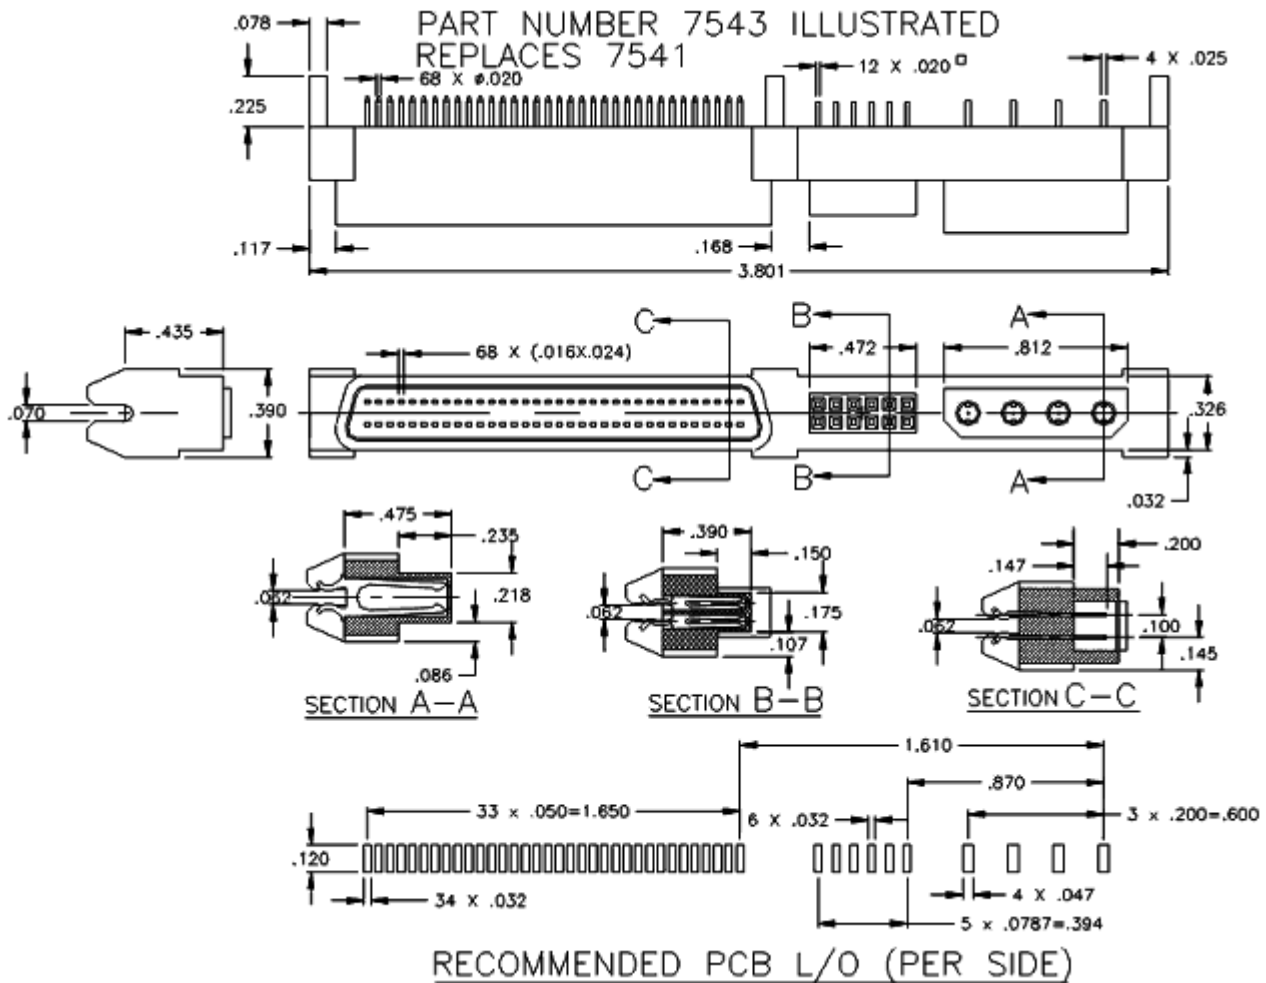

RECOMMENDED PCB L/O (PER SIDE)

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7543											X	One Per

Technical Notes	
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Insulation Resistance:	5000 MegOhm @ 500VDC
Max Processing Temp:	250°C for 60 seconds
Plating:	Power = tin Signal = G2 (tin/gold)
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com