


.100	Header	Double Row - Stacking	Straight	Surface Mount
-------------	---------------	------------------------------	-----------------	----------------------

.100 inch Center - .025 inch Square Pin - Board Stacking - Double Row Straight SMD Header

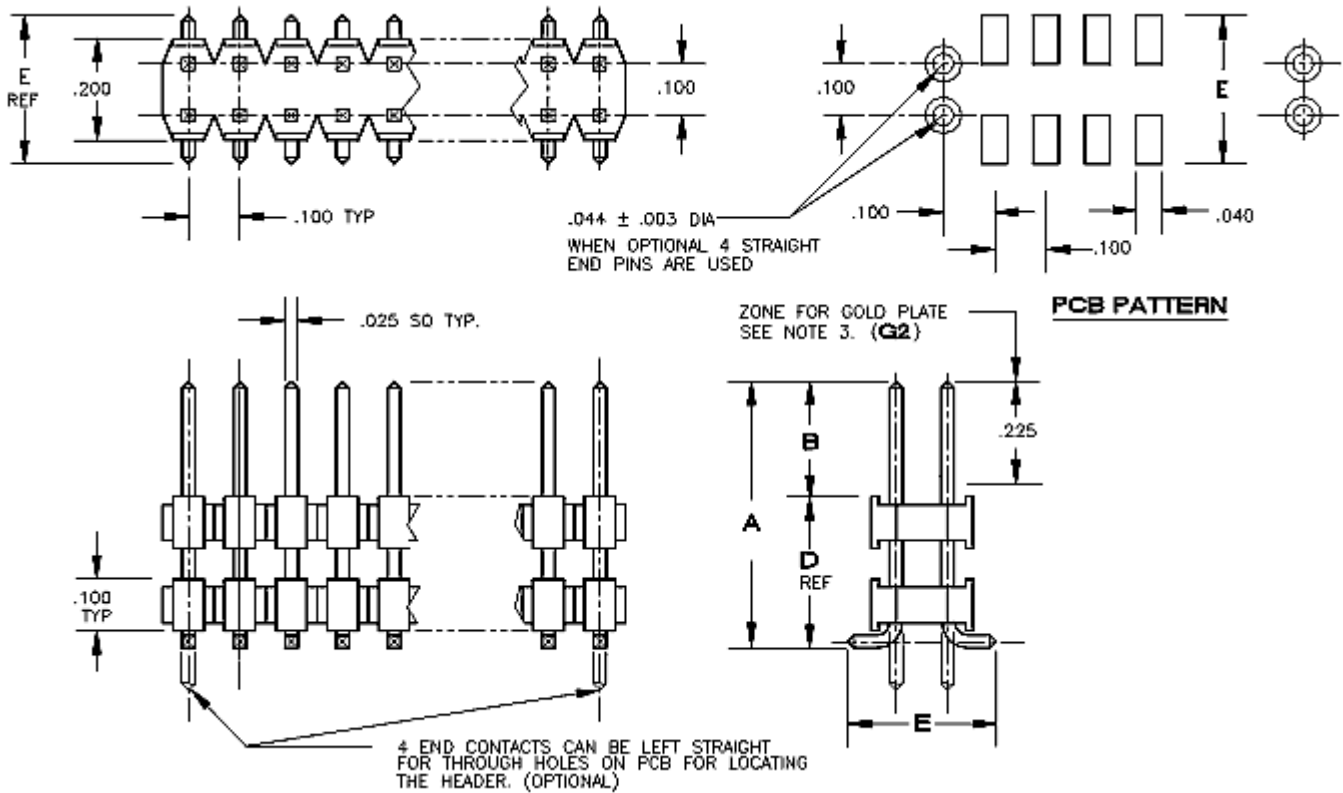

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1SMD2-225/300/370	13.34	0.525	5.72	0.225			7.62	0.300	9.40	0.370	G2 : T	4-40
1SMD2-225/400/370	15.88	0.625	5.72	0.225			10.16	0.400	9.40	0.370	G2 : T	4-40
1SMD2-225/500/370	18.42	0.725	5.72	0.225			12.70	0.500	9.40	0.370	G2 : T	4-40
1SMD2-225/600/370	23.50	0.925	5.72	0.225			17.78	0.700	9.40	0.370	G2 : T	4-40
1SMD2-225/900/370	29.21	1.150	5.72	0.225			22.86	0.900	9.40	0.370	G2 : T	4-40
1SMD2-225/1000/370	31.75	1.250	5.72	0.225			25.40	1.000	10.67	0.420	G2 : T	4-40

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds

Plastic:

High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com