


.100	HDD	40 Female + 4 Female Power - for Maxtor	Right Angle	for Maxtor
------	-----	---	-------------	------------

ATA Disk Drive Combo Conn: 40 Female + 4 Female Power - Straddle Mount - for Western Digital

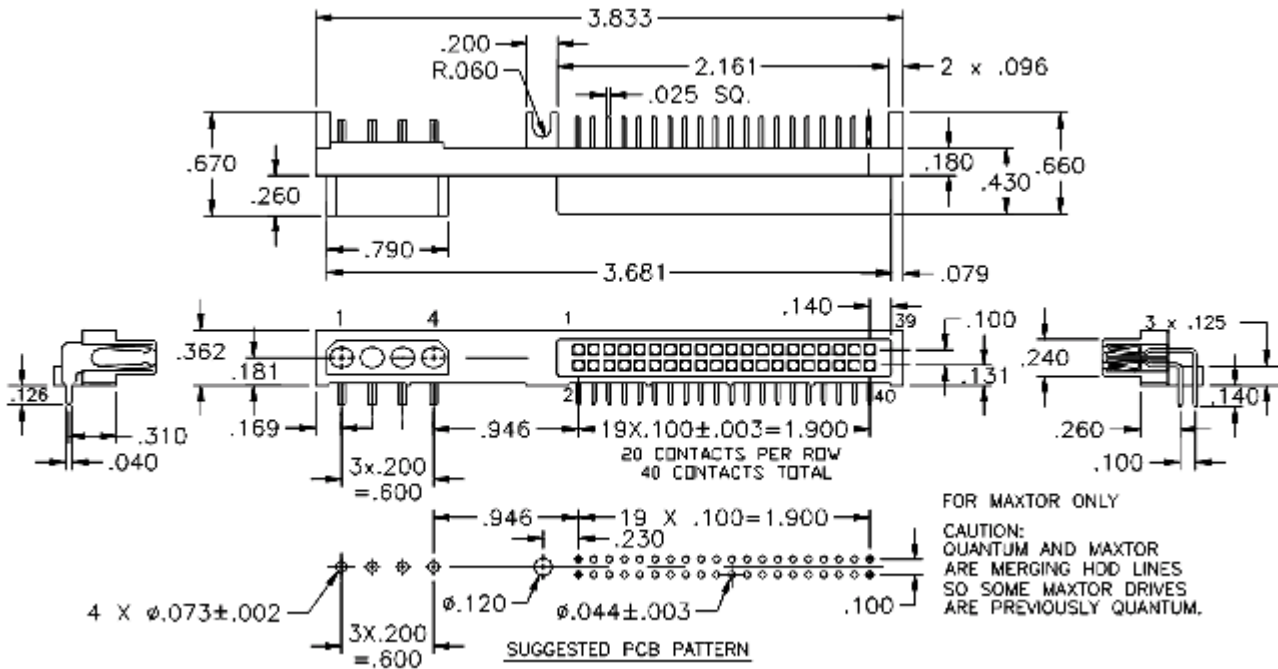

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>7501M</b> for Maxtor											X	One Per
<b>7501MHS</b> Hot Swap											X	One Per

Technical Notes	
<b>Mates with Drives from:</b>	Original Maxtor version (previous Quantum drives will not mate)
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Insertion Force - total:</b>	11 pounds (5.0 Kg) total
<b>Extraction Force - total:</b>	6.8 pounds (3.0 Kg)
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plating:</b>	Power = tin Signal = G2 (tin/gold)
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)