


.100	Header	Double Row - Saddle Mount	Surface Mount
------	--------	---------------------------	---------------

.100 inch Center - .025 inch Square Pin - Saddle Mount - Double Row SMD Header

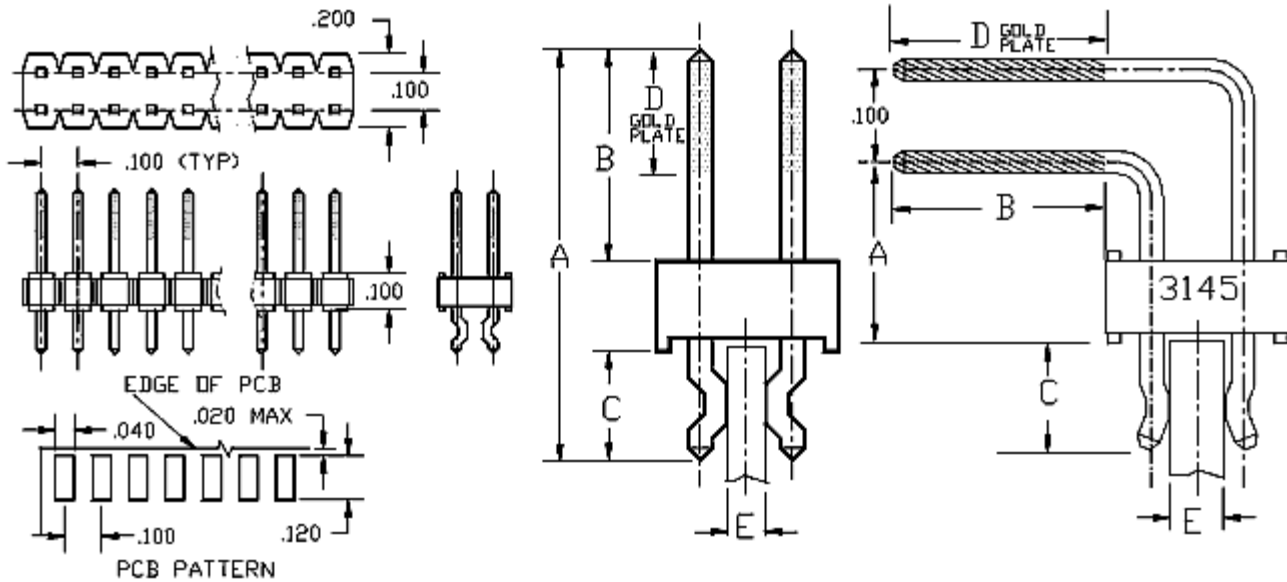

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3145 Right Angle	5.00	0.197	5.84	0.230	2.95	0.116	5.84	0.230	1.57	0.062	G2 : T	2-80
3143	11.43	0.450	5.97	0.235	3.05	0.120	5.84	0.230	1.57	0.062	G2 : T	2-80
3140	11.43	0.450	5.97	0.235	3.05	0.120	5.84	0.230	1.19	0.047	G2 : T	2-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com