


Catalog Page 22-2

.100	Header	Double Row - Box	Rt Angle	Thru Hole
------	--------	------------------	----------	-----------

.100 inch Center - .025 inch Square Pin - Box - Double Row Right Angle Header

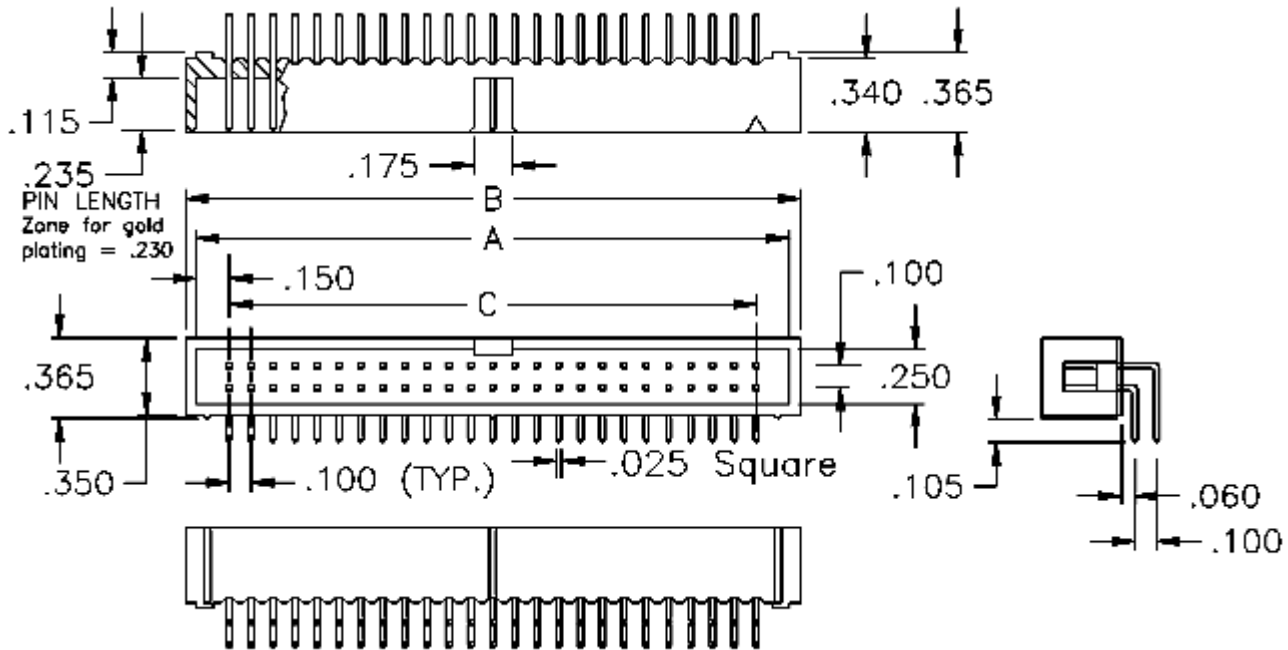

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>4401R</b> 10 position	17.78	0.700	20.32	0.800	10.16	0.400					G2 : T	10
<b>4401R</b> 14 position	22.86	0.900	25.40	1.000	15.24	0.600					G2 : T	14
<b>4401R</b> 16 position	25.40	1.000	27.94	1.100	17.78	0.700					G2 : T	16
<b>4401R</b> 20 position	30.48	1.200	33.02	1.300	22.86	0.900					G2 : T	20
<b>4401R</b> 26 position	38.10	1.500	40.64	1.600	30.48	1.200					G2 : T	26
<b>4401R</b> 34 position	48.26	1.900	50.80	2.000	40.64	1.600					G2 : T	34
<b>4401R</b> 40 position	55.88	2.200	58.42	2.300	48.26	1.900					G2 : T	40
<b>4401R</b> 50 position	68.58	2.700	71.12	2.800	60.96	2.400					G2 : T	50
<b>4401R</b> 60 position	81.28	3.200	83.82	3.300	73.66	2.900					G2 : T	60
<b>4401R</b> 64 position	86.36	3.400	88.90	3.500	78.74	3.100					G2 : T	64

**Technical Notes**

**Contact Material:** Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends

<b>Insulation Material:</b>	Glass Filled Nylon or Polyester - UL 94V-0 rated - Black
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	125°C for 60 seconds

***COMM CON CONNECTORS INC.***

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)