


Catalog Page 23-1

.100	Header	Double Row - Box Stacking	Straight	Thru Hole
------	--------	---------------------------	----------	-----------

.100 inch Center - .025 inch Square Pin - Box - Board Stacking - Double Row Straight Header

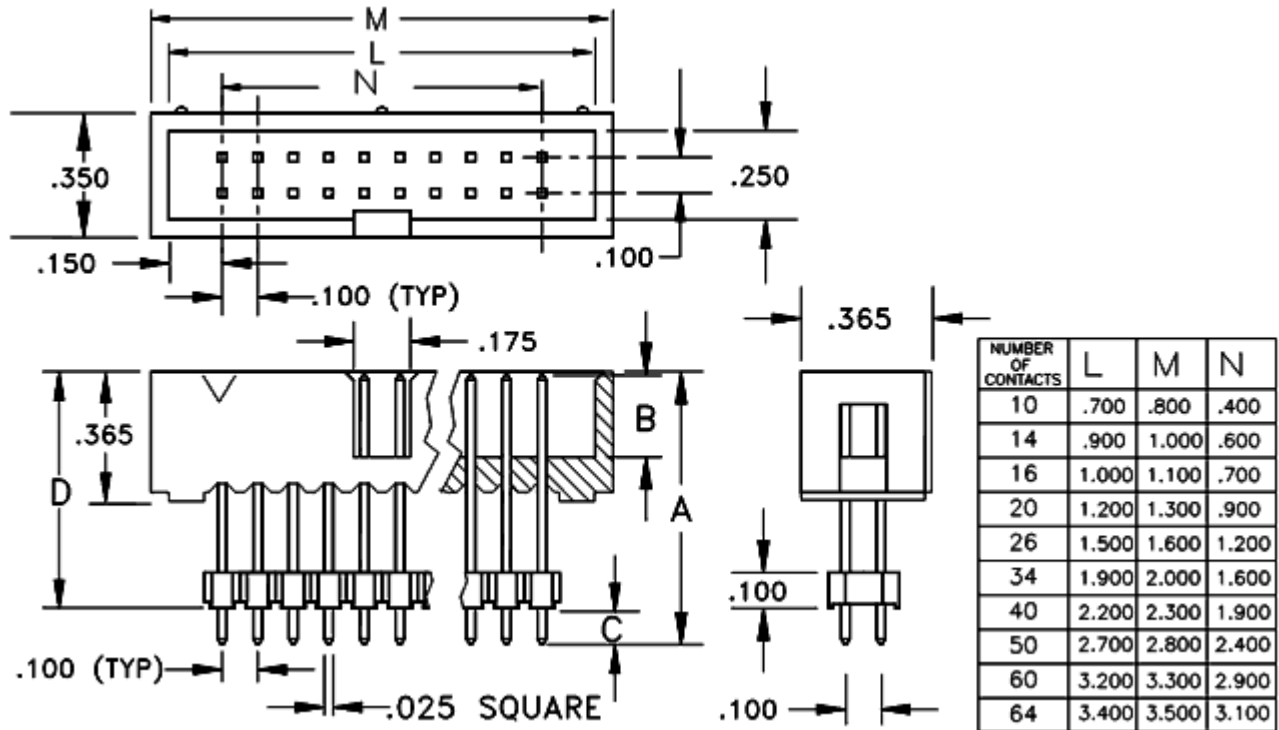

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
PDH2-350/520/115	16.13	0.635	5.97	0.235	2.92	0.115	13.21	0.520			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/620/115	18.67	0.735	5.97	0.235	2.92	0.115	15.75	0.620			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/720/115	21.21	0.835	5.97	0.235	2.92	0.115	18.29	0.720			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/820/115	23.75	0.935	5.97	0.235	2.92	0.115	20.83	0.820			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/920/115	26.29	1.035	5.97	0.235	2.92	0.115	23.37	0.920			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/1020/115	28.83	1.135	5.97	0.235	2.92	0.115	25.91	1.020			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/1120/115	31.37	1.235	5.97	0.235	2.92	0.115	28.45	1.120			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/1220/115	33.91	1.335	5.97	0.235	2.92	0.115	30.99	1.220			T : G2	10:14:16:20:26:34:40:50:6
PDH2-350/1320/115	36.45	1.435	5.97	0.235	2.92	0.115	33.53	1.320			T : G2	10:14:16:20:26:34:40:50:6

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon or Polyester - UL 94V-0 rated - Black
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	125°C for 60 seconds

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com