


Use this browser's print function to print this entire page, then close this window.

Catalog Page 28-2

.100"	Socket	Double Row - for .025" pins	Straight	Thru Hole
-------	--------	-----------------------------	----------	-----------

.100" Center, Double Row Straight, accepting .025" Square Pin, Socket

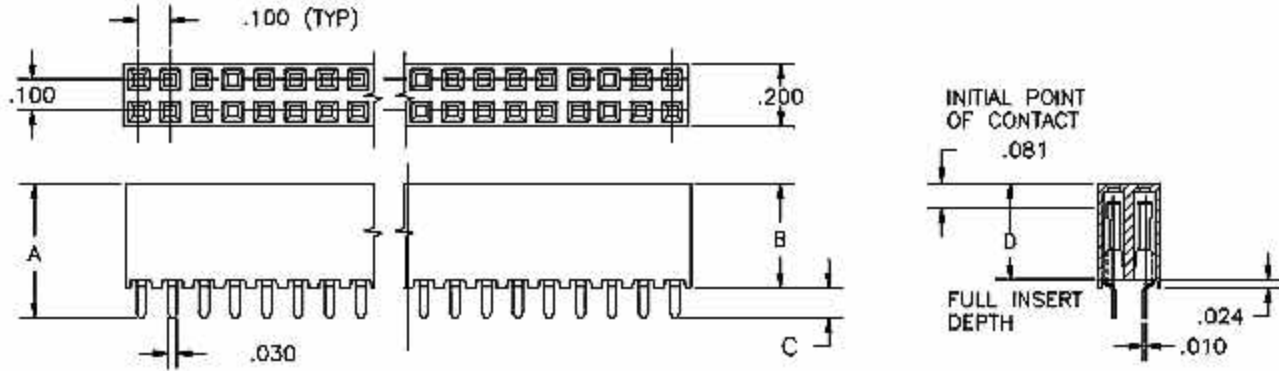

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1116	10.92	0.430	8.51	0.335	2.44	0.096	7.82	0.308			G2 : T	4-80

**Technical Notes**

<b>Contact Material:</b>	Contact: 2 Finger Stamped, Phosphor Bronze
<b>Insulate Material:</b>	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
<b>Temperature Range:</b>	-65°C to +250°C
<b>Insulation Resistance:</b>	5,000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amp continuous @ 100 VDC/contact
<b>Max Processing Temperature:</b>	250°C for 60 seconds

**COMM CON CONNECTORS INC.**

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: [info@commcon.com](mailto:info@commcon.com)