


Catalog Page 32-1

<b>.100</b>	<b>Socket</b>	<b>Double Row - Straddle Mount</b>	<b>Straight</b>	<b>Thru Hole</b>
-------------	---------------	------------------------------------	-----------------	------------------

.100 inch Center - Double Row Straight - Straddle Mount - accepting .025 inch Square Pin - Socket

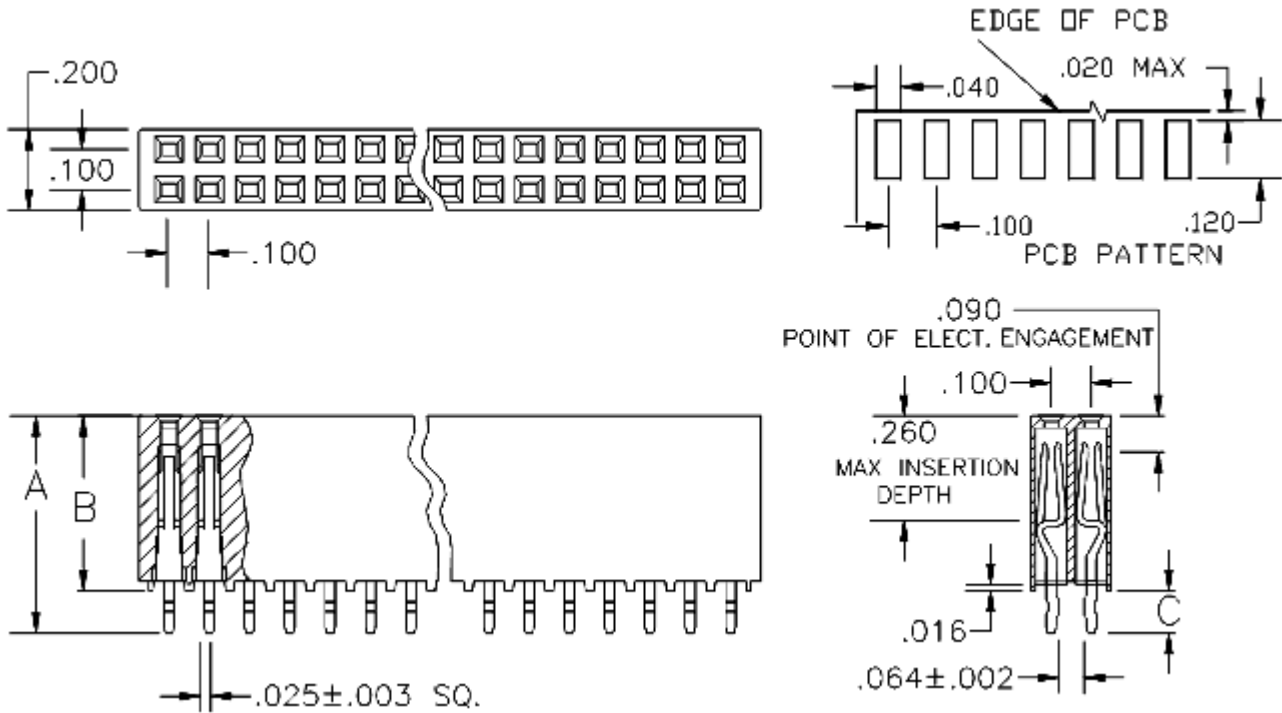

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1129</b>	13.72	0.540	11.05	0.435	2.67	0.105					G2	4-64

Technical Notes	
<b>Contact Material:</b>	Contact: Stamped - Phosphor Bronze - DIN dual beam
<b>Insulation Material:</b>	Thermoplastic - UL 94V-0 rated - Black
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	67 grams (2.4oz) (typ initial force per contact w/ .025 inch sq pin)
<b>Extraction Force:</b>	47 grams (1.7 oz) (typ initial force per contact w/ .025 inch sq pin)

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)