


.100	Socket	Single Row - .025 Top/Bottom Entry	Straight	Thru Hole
------	--------	------------------------------------	----------	-----------

.100 inch Center - Single Row Straight - Top/Bottom entry - accepting .025 inch Square Pin - Socket

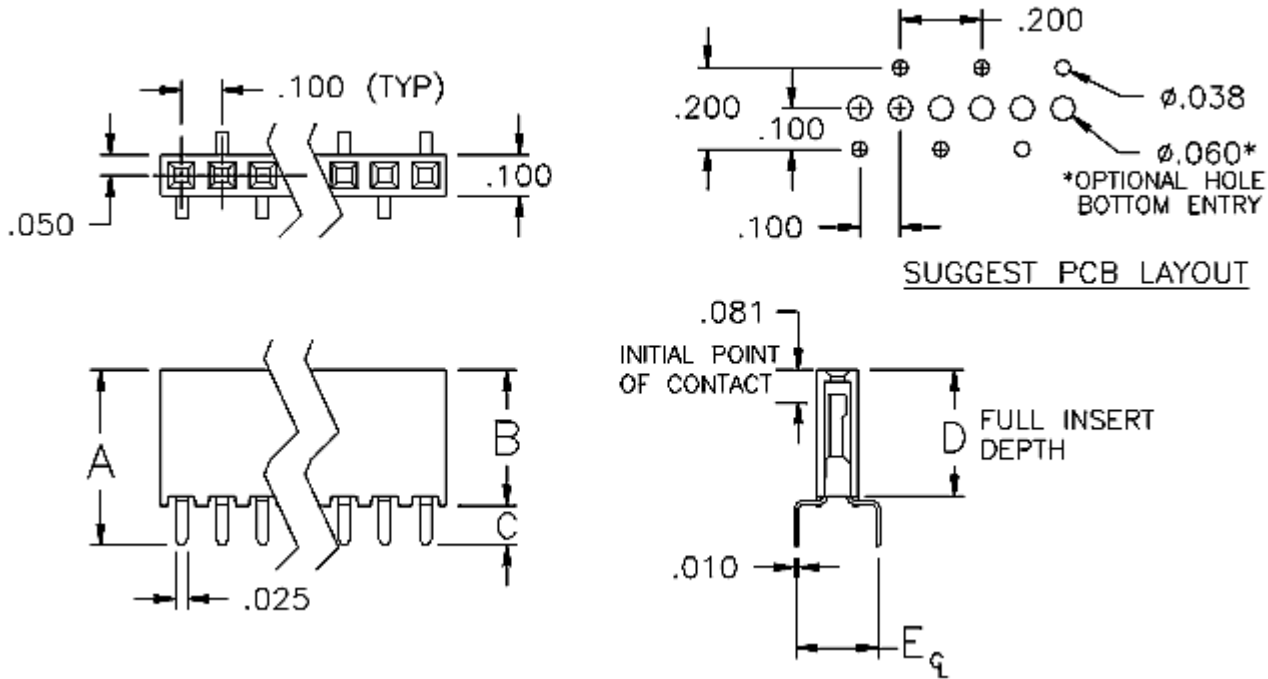

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1135 thru hole	10.95	0.431	8.51	0.335	2.44	0.096	7.87	0.310	5.08	0.200	T : G2	2-40

Technical Notes	
Contact Material:	Contact: 2 Finger Stamped - Phosphor Bronze
Insulation Material:	Thermoplastic - UL 94V-0 rated - Black
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amp continuous @ 100 VDC/contact
Max Processing Temp:	150°C for 60 seconds
Insertion Force:	67 grams (2.4oz) (typ initial force per contact w/ .025 inch sq pin)
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com