


.100	Socket	Double Row - Lowest Profile Surface Mount	Straight	Surface Mount
------	--------	---	----------	---------------

.100 inch Center - Double Row Straight - Lowest Profile - accepting .025 inch Pin - SMD Socket

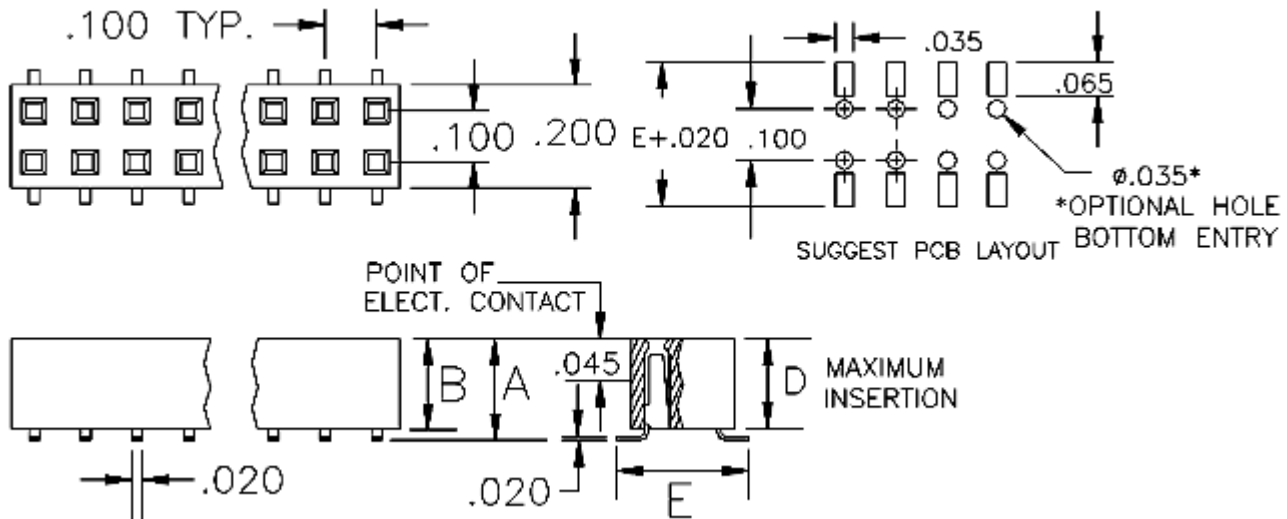

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1153	5.00	0.197	4.44	0.175			4.57	0.180	6.60	0.260	T : G2	4-30

Technical Notes	
<b>Contact Material:</b>	Contact: 2 Finger Stamped - Phosphor Bronze
<b>Insulation Material:</b>	Thermoplastic - UL 94V-0 rated - Black
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	2 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	200 grams (7.0 oz) (typ initial per w/ .025 inch sq pin)
<b>Extraction Force:</b>	88 grams (3.1 oz) (typ initial per w/ .025 inch sq pin)
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)