


.100	Socket	Double Row - .025	Rt Angle	Thru Hole
------	--------	-------------------	----------	-----------

.100 inch Center - Double Row Horizontal Right Angle - accepting .025 inch Square Pin - Socket

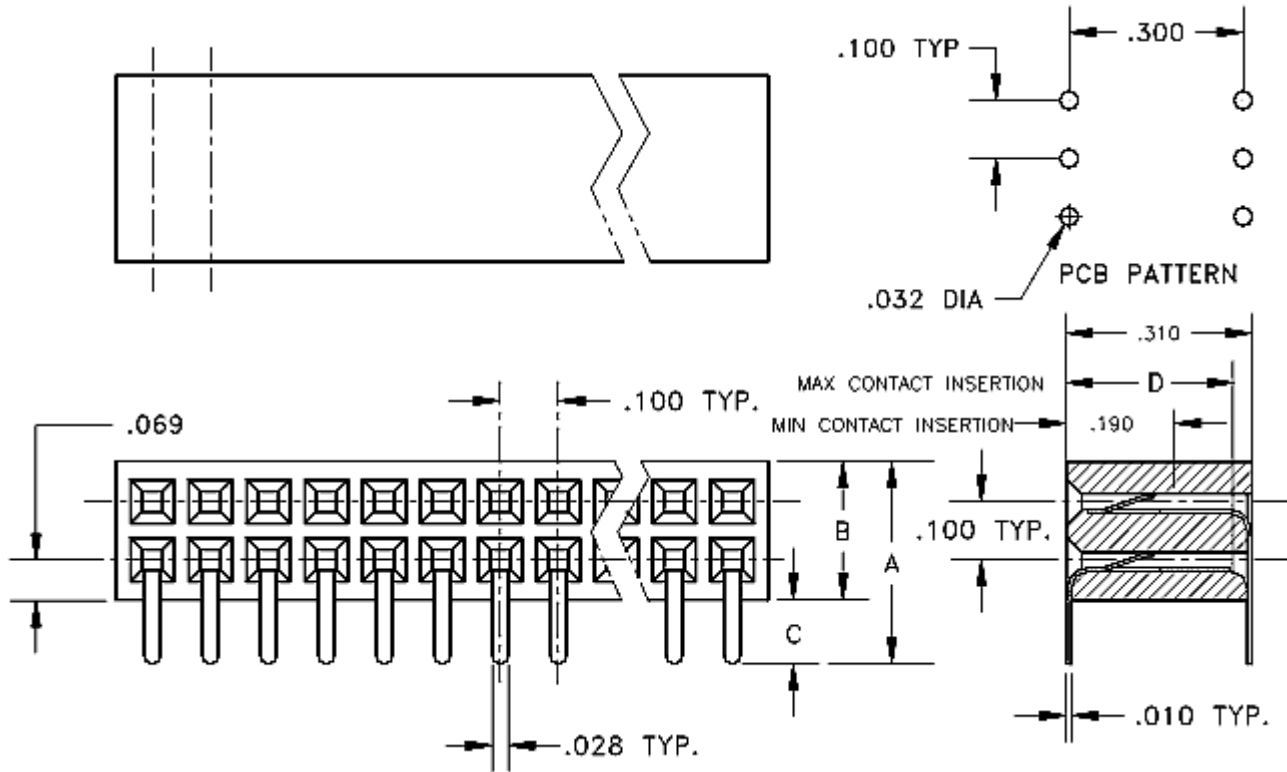

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1132	9.09	0.358	6.05	0.238	3.05	0.120	7.37	0.290			G2 : T : G230	4-130

Technical Notes	
<b>Contact Material:</b>	Contact: Stamped - BeCu - single beam
<b>Insulation Material:</b>	Glass Filled Thermoplastic - UL 94V-0 rated - Black
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	185 grams (6.3oz) (typ initial force per contact w/ .025 inch sq pin)
<b>Extraction Force:</b>	102 grams (3.6 oz) (typ initial force per contact w/ .025 inch sq pin)
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)