


.100	Socket	.800 inch boards - PC/104 Non-Stackthru	2 Rows	J1/J2
------	--------	--	--------	-------

.800 inch board centerline - PC/104 Connector - 40 & 64 position - Non-Stackthru & Spacer

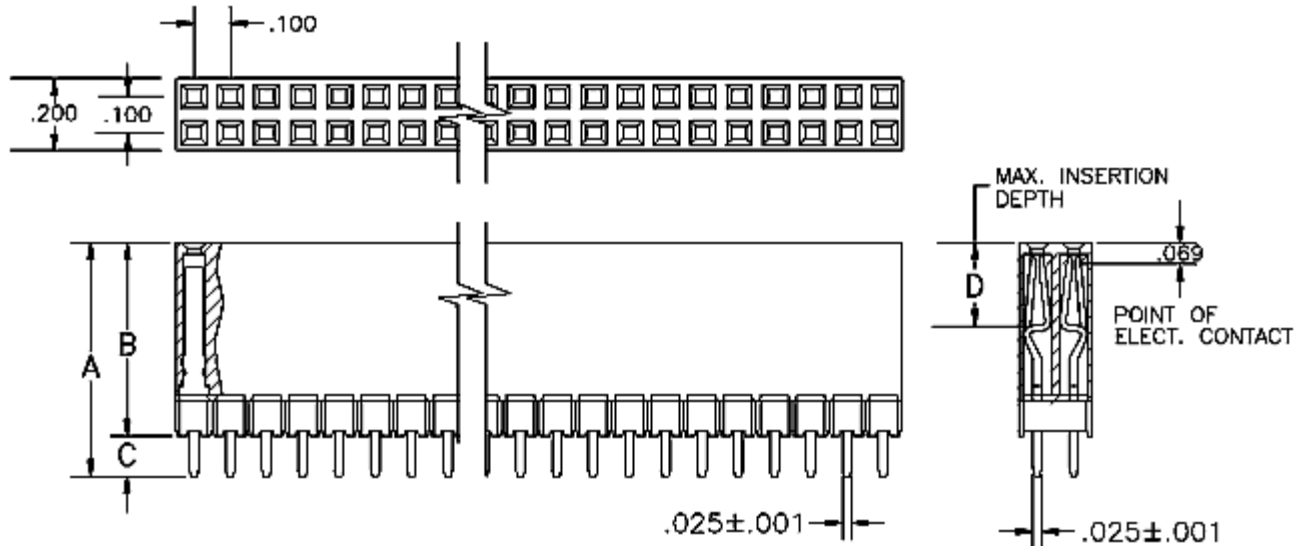

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1181A	14.35	0.565	11.56	0.455	2.79	0.110	6.10	0.240			G2	80-4
1198 PC/104 spacer	15.62	0.615	11.56	0.455	4.06	0.160	6.53	0.257			G : G2	80-4
1181 0.8	16.89	0.665	14.10	0.555	2.79	0.110	6.10	0.240			G2	80-4

Technical Notes	
Contact Material:	Contact: Stamped - Phosphor Bronze - DIN dual beam
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	67 grams (2.4oz) (typ initial force per contact w/ .025 inch sq pin)
Extraction Force:	47 grams (1.7 oz) (typ initial force per contact w/ .025 inch sq pin)
Plastic:	High Temperature Compatible