


Use this browser's print function to print this entire page, then close this window.

Catalog Page 45-1

Hi Temperature Plastic

.050	Header	Single Row - .018 Round Pin	Straight	Thru Hole
------	--------	-----------------------------	----------	-----------

.050" Center, .018" Dia Round Pin, Single Row Straight Header

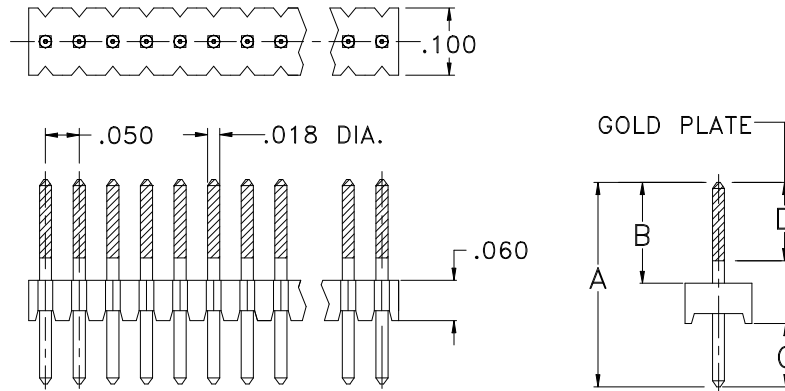

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3354	6.35	0.250	2.41	0.095	2.41	0.095					TLF	1-60
3353	6.35	0.250	3.81	0.150	1.02	0.040	3.81	0.150			G2LF : TLF	1-60
3352	8.76	0.345	3.81	0.150	3.43	0.135	3.30	0.130			G2LF : TLF	1-60
3350	8.89	0.350	4.19	0.165	3.18	0.125	3.81	0.150			G2LF : TLF	1-60
3351	10.41	0.410	5.84	0.230	3.05	0.120	5.84	0.230			G2LF : TLF	1-60
3355	12.70	0.500	5.84	0.230	5.33	0.210	5.84	0.230			G2LF : TLF	1-60
3357	16.26	0.640	12.45	0.490	2.29	0.090	3.68	0.145			G2LF : TLF	1-60
3358	21.59	0.850	17.78	0.700	2.29	0.090	3.68	0.145			G2LF : TLF	1-60
3356	23.75	0.935	3.68	0.145	18.54	0.730	3.81	0.150			G2LF : TLF	1-60
3359	28.58	1.125	24.76	0.975	2.29	0.090	3.68	0.145			G2LF : TLF	1-60

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .018" dia. pin, drawn wire, burr free both
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	