


Use this browser's print function to print this entire page, then close this window.

Catalog Page 46-2

Hi Temperature Plastic

.050	Header	Single Row - .016 Low Profile	Rt Angle	Thru Hole
-------------	---------------	--------------------------------------	-----------------	------------------

.050" Center, .016" Square Pin, Low Profile - Single Row Right Angle Header

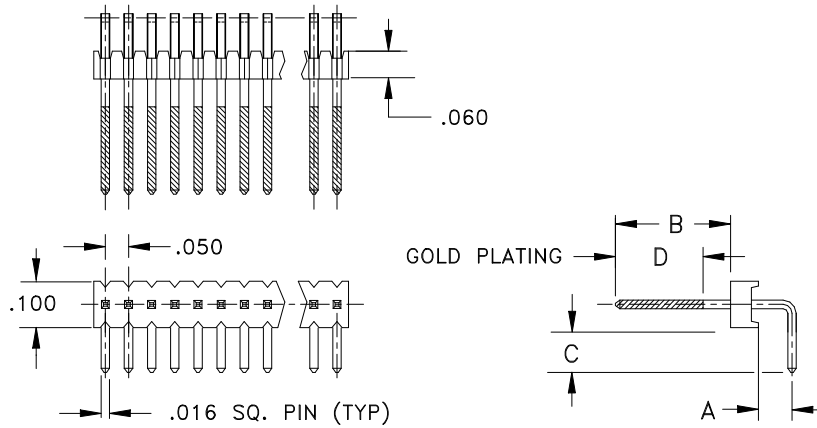

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3403R	1.52	0.060	2.54	0.100	2.29	0.090	2.54	0.100			G2LF : TLF	1-60
3404R	1.52	0.060	3.81	0.150	2.29	0.090	3.68	0.145			G2LF : TLF	1-60
3405R	1.52	0.060	1.65	0.065	1.40	0.055	1.65	0.065			G2LF : TLF	1-60
3406R	1.52	0.060	4.70	0.185	2.29	0.090	3.68	0.145			G2LF : TLF	1-60

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .016"sq. pin, drawn wire, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	