


Use this browser's print function to print this entire page, then close this window.

Catalog Page 48-1

Hi Temperature Plastic

.050	Header	Double Row – SCSI 3 Unshrouded	Straight	Thru Hole
-------------	---------------	---------------------------------------	-----------------	------------------

.050" x .100" Center, - SCSI 3 Compatible - Double Row Straight Header

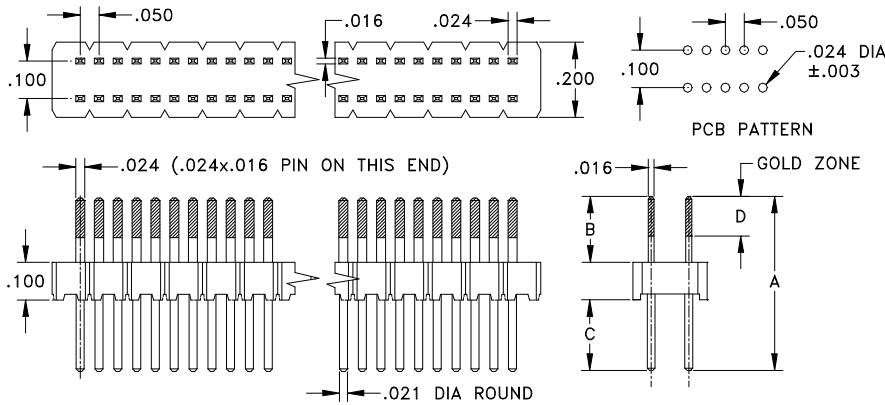

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3941 for SCSI	10.41	0.410	4.57	0.180	3.05	0.120	4.57	0.180			G2LF : TLF	4-100
3942 for SCSI	15.49	0.610	4.57	0.180	9.40	0.370	4.57	0.180			G2LF : TLF	4-100
3943 for SCSI	20.57	0.810	4.57	0.180	14.48	0.570	4.57	0.180			G2LF : TLF	4-100

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .016" x .024" top/.021" dia. bottom, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	