


Use this browser's print function to print this entire page, then close this window.

Catalog Page 49-1

Hi Temperature Plastic

<b>.050</b>	<b>Header</b>	<b>Double Row – SCSI 3 Unshrouded Stacking</b>	<b>Straight</b>	<b>Thru Hole</b>
-------------	---------------	--	-----------------	------------------

.050" x .100" Center, - SCSI 3 Compatible – Board Stacking Double Row Straight Header

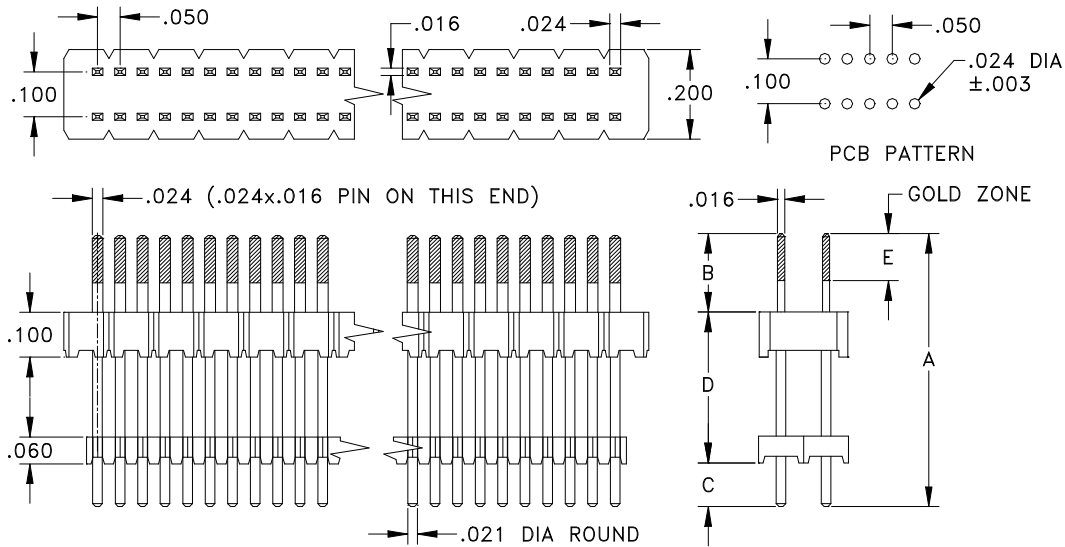

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>8301</b> for SCSI	14.48	0.570	4.57	0.180	3.05	0.120	6.86	0.270	4.57	0.180	G2LF : TLF	4-68
<b>8302</b> for SCSI	19.56	0.770	4.57	0.180	3.05	0.120	11.94	0.470	4.57	0.180	G2LF : TLF	4-68

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .016" x .024" top/.021" dia. bottom, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>COMM CON WORLDWIDE INC.</b>	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: <a href="mailto:info@commcon.com">info@commcon.com</a>	