


Use this browser's print function to print this entire page, then close this window.

Catalog Page 49-3

Hi Temperature Plastic

.050	Header	Double Row - .018 Rd pin .050x.100	Straight	Thru Hole
-------------	---------------	---	-----------------	------------------

.050" x .100" Center, - .018 Diameter Round Pin - Double Row Straight Header

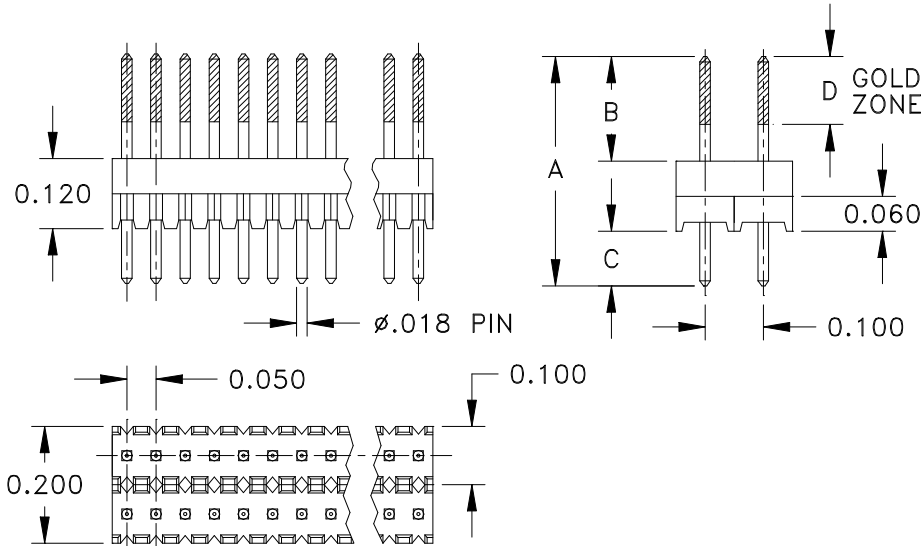

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
8028	6.35	0.250	1.65	0.065	1.65	0.065	1.65	0.065			TLF	4-68
8027	10.41	0.410	5.08	0.200	2.29	0.090	3.81	0.150			G2LF: TLF	4-68

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .018" dia. Round pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	