


Use this browser's print function to print this entire page, then close this window.

Catalog Page 62-2

Hi Temperature Plastic

2mm	Header	Double Row	Straight	Thru Hole
-----	--------	------------	----------	-----------

2mm Center, .020" Square Pin, Double Row Straight Header

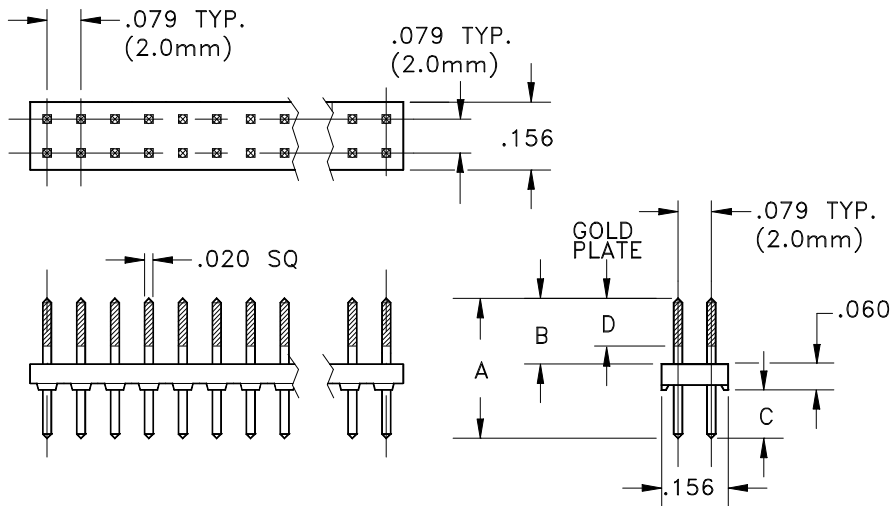

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2200S	3.81	0.150	1.14	0.045	1.14	0.045					TLF	4-100
2212S	5.72	0.225	2.67	0.105	1.52	0.060	2.67	0.105			G2LF : TLF	4-100
2213S	6.60	0.260	3.18	0.125	1.90	0.075	3.18	0.125			G2LF : TLF	4-100
2202S	8.13	0.320	3.56	0.140	3.05	0.120	3.56	0.140			G2LF : TLF	4-100
2203S	8.51	0.335	3.99	0.157	3.00	0.118	3.99	0.157			G2LF : TLF	4-100
2210S	9.02	0.355	4.44	0.175	3.05	0.120	3.56	0.140			G2LF : TLF	4-100
2204S	9.78	0.385	5.72	0.225	2.54	0.100	3.56	0.140			G2LF : TLF	4-100
2206S	10.41	0.410	6.35	0.250	2.54	0.100	3.56	0.140			G2LF : TLF	4-100
2214S	11.81	0.465	4.57	0.180	6.48	0.255	3.56	0.140			G2LF : TLF	4-100
2205S	13.84	0.545	9.78	0.385	2.54	0.100	3.56	0.140			G2LF : TLF	4-100
2207S	14.48	0.570	10.16	0.400	2.79	0.110	3.56	0.140			G2LF : TLF	4-100
2208S	16.51	0.650	12.19	0.480	2.79	0.110	3.56	0.140			G2LF : TLF	4-100
2209S	18.54	0.730	14.22	0.560	2.79	0.110	3.56	0.140			G2LF : TLF	4-100
2215S	25.15	0.990	3.56	0.140	20.07	0.790	3.56	0.140			G2LF : TLF	4-100
2216S	29.11	1.146	3.56	0.140	24.03	0.946	3.56	0.140			G2LF : TLF	4-100

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020”sq pin, drawn wire, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
<i>COMM CON WORLDWIDE INC.</i>	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	