


Use this browser's print function to print this entire page, then close this window.

**Catalog Page 64-1**

**High Temperature Plastic**

<b>2mm</b>	<b>Header</b>	<b>Single Row</b>	<b>Rt Angle</b>	<b>Thru Hole</b>
------------	---------------	-------------------	-----------------	------------------

2mm Center - .020 inch Square Pin - Single Row Right Angle Header

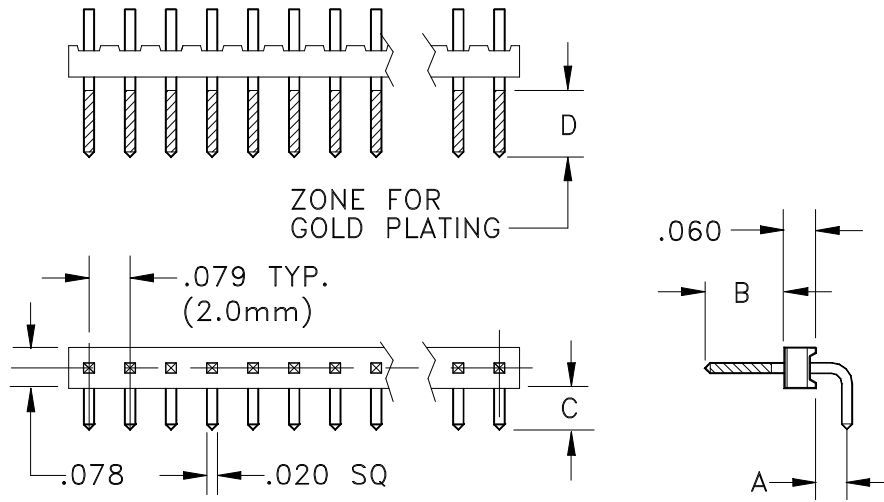

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>2301R</b>	1.52	0.060	3.56	0.140	3.05	0.120	3.56	0.140			G2LF : TLF	2-40
<b>2302R</b>	1.52	0.060	3.99	0.157	2.79	0.110	3.56	0.140			G2LF : TLF	2-40
<b>2304R</b>	1.52	0.060	3.56	0.140	2.54	0.100	3.56	0.140			G2LF : TLF	2-40
<b>2303R</b>	1.52	0.060	3.99	0.157	2.03	0.080	3.56	0.140			G2LF : TLF	2-40

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	2 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>COMM CON WORLDWIDE INC.</b>	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: <a href="mailto:info@commcon.com">info@commcon.com</a>	