


Catalog Page 64-2

High Temperature Plastic

2mm	Header	Double Row	Rt Angle	Thru Hole
------------	---------------	-------------------	-----------------	------------------

2mm Center - .020 inch Square Pin - Double Row Right Angle Header

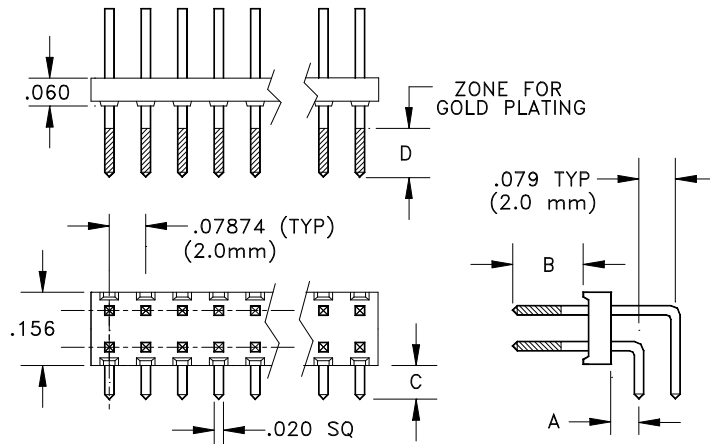

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2701R	1.52	0.060	3.56	0.140	3.15	0.124	3.56	0.140			G2LF : TLF	4-80
2702R	1.52	0.060	3.99	0.157	2.79	0.110	3.56	0.140			G2LF : TLF	4-80
2703R	1.52	0.060	3.99	0.157	2.03	0.080	3.56	0.140			G2LF : TLF	4-80
2704R	1.52	0.060	3.56	0.140	2.41	0.095	3.56	0.140			G2LF : TLF	4-80
2705R	1.52	0.060	4.27	0.168	2.46	0.097	3.56	0.140			G2LF : TLF	4-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	