


Use this browser's print function to print this entire page, then close this window.

Catalog Page 68-2

High Temperature Plastic

2mm	Header	Double Row	Straight	Surface Mount
-----	--------	------------	----------	---------------

2mm Center - .020 inch Square Pin - Double Row Straight SMD Header

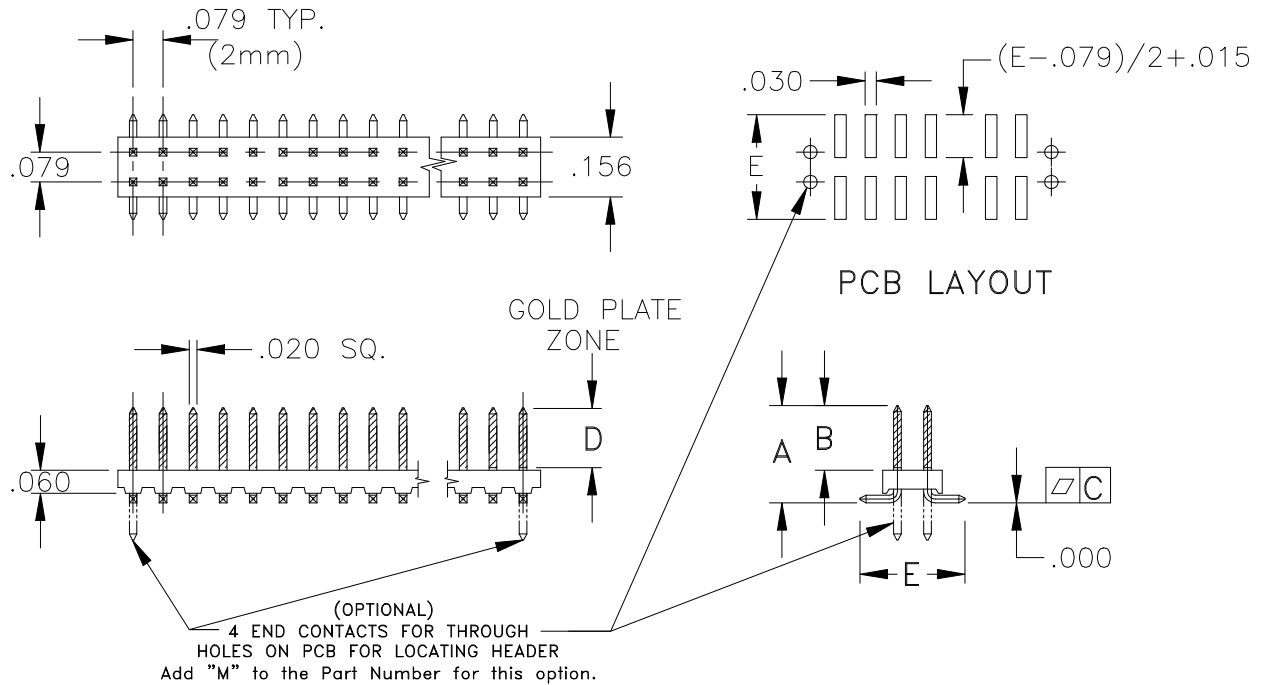

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
HTSM2201 HTSM2201M	4.06	0.160	2.03	0.080	0.10	0.004	2.03	0.080	5.94	0.234	G2LF : TLF	4-20
HTSM2202 HTSM2202M	5.84	0.230	3.56	0.140	0.10	0.004	3.56	0.140	8.00	0.315	G2LF : TLF	4-20
HTSM2204 HTSM2204M	5.84	0.230	3.68	0.145	0.10	0.004	3.56	0.140	7.87	0.310	G2LF : TLF	4-20
HTSM2205 HTSM2205M	6.15	0.242	4.00	0.157	0.10	0.004	3.56	0.140	7.37	0.290	G2LF : TLF	4-20
HTSM2203 HTSM2203M	6.22	0.245	4.00	0.157	0.10	0.004	3.56	0.140	6.99	0.275	G2LF : TLF	4-20

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
COMM CON WORLDWIDE INC.	
759 Flynn Road, Camarillo, Ca 93012 · (805) 384-4898 · fax (805) 384-4899 · e-mail: info@commcon.com	