


Use this browser's print function to print this entire page, then close this window.

Catalog Page 71-3

Hi Temperature Plastic

2mm	Header	Triple Row - Round Pin	Straight	Thru Hole
-----	--------	------------------------	----------	-----------

2mm Center, .020" Diameter Round Pin, Triple Row Straight Header

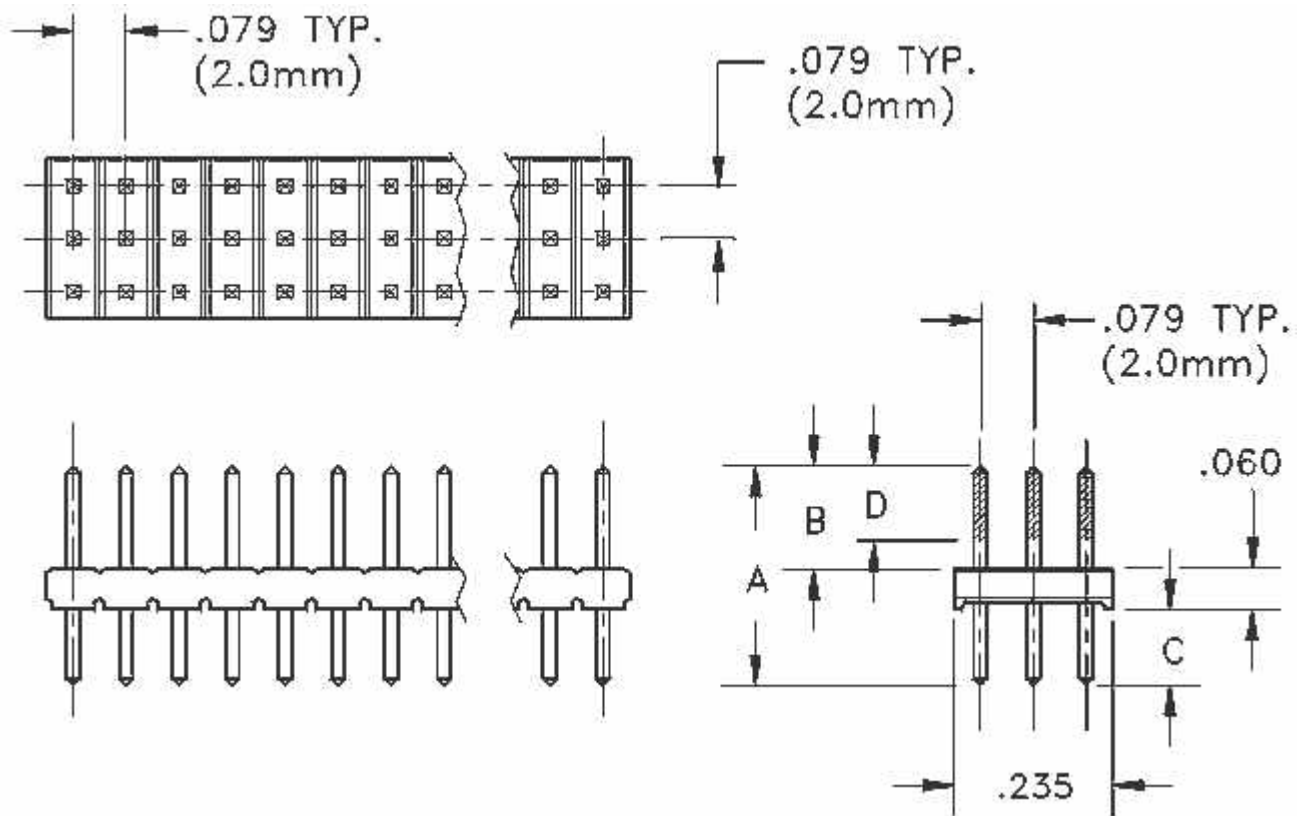

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2872MS	8.13	0.320	3.56	0.140	3.05	0.120	3.56	0.140			G2 : T	3-90

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .020" round, burr free both ends
Insulate Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Temperature Range:	-65°C to +250°C
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	2 amp continuous @ 100 VDC/contact
Max Processing Temperature:	250°C for 60 seconds
Heat Deflection:	260°C @ 264 PSI per ASTM D648

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: info@commcon.com