Use this browser's print function to print this entire page, then close this window.

Catalog Page 72-1 High Temperature Compatible

Jacks	Headers	Double Row - Box	Straight	Thru Hole

Jones Centers .025" Square Pin, Box, Double Row Straight Header

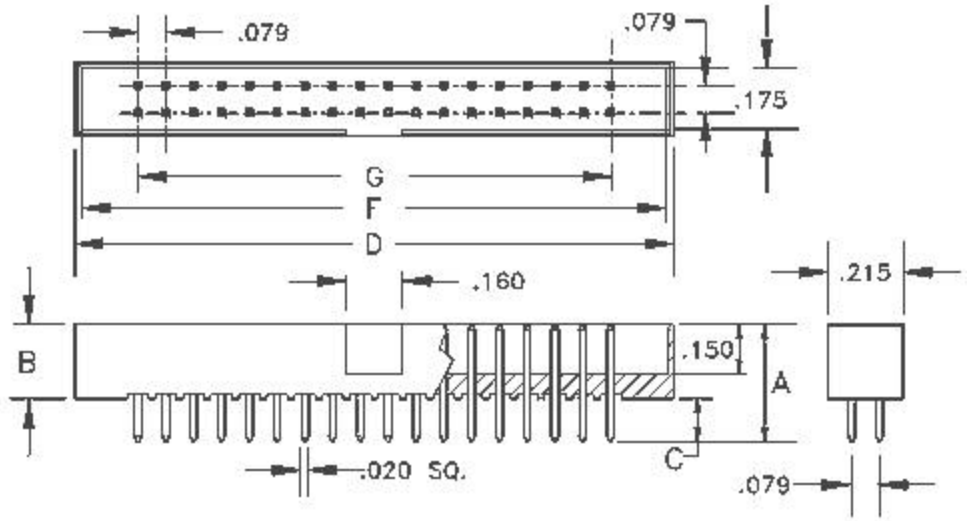

NUMBER OF CONTACTS	D	F	G
10	.673	.634	.315
12	.752	.713	.394
14	.831	.791	.472
16	.909	.870	.551
20	1.067	1.028	.709
24	1.224	1.185	.866
26	1.303	1.264	.945
30	1.461	1.421	1.102
34	1.618	1.579	1.260
36	1.697	1.657	1.339
44	2.012	1.972	1.654
50	2.248	2.209	1.890
60	2.642	2.602	2.283
68	2.957	2.917	2.598

Part No.	A		B		C		D		E		Notes	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2422	8.13	0.320	5.59	0.220	2.54	0.100					G2- T	10-12-14-16-20-24-26-30-34-36-44-50-60-68
2423	9.78	0.385	5.59	0.220	4.19	0.165					G2- T	10-12-14-16-20-24-26-30-34-36-44-50-60-68

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .025" sq. drawn wire, bare for both ends
Insulation Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	3 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC

1640 Evergreen Street, Duarte, Ca 91010 - (626) 301-4200 - fax (626) 301-4212 - e-mail: