Use this browser's print function to print this entire page, then close this window.

Catalog Page 72-2

High Temperature Compatible

Jaxn	Header	Double Row - Box	Straight	Surface Mount

Jaxn Center, .025" Square Pin, Box, Double Row Straight Surface Mount Header

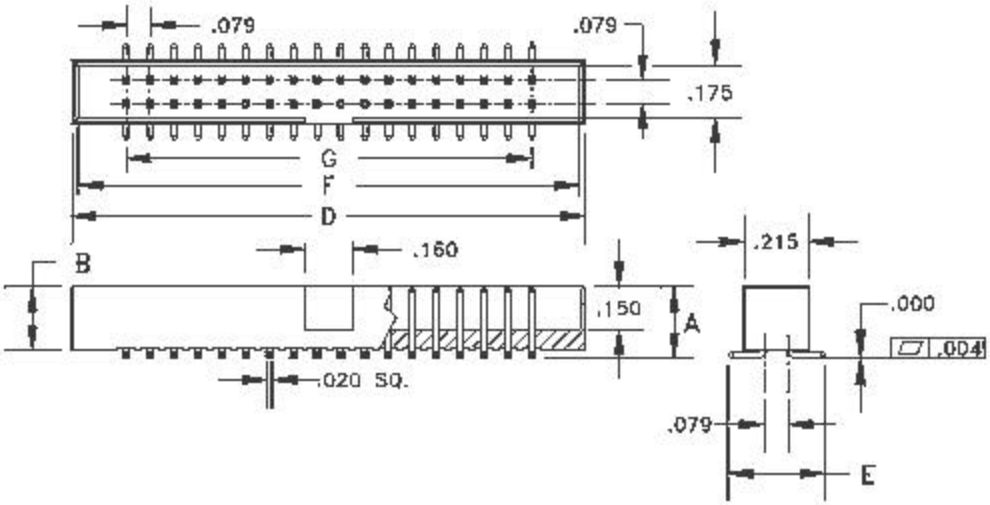

NUMBER OF CONTACTS	D	F	G
10	.673	.634	.315
12	.752	.713	.394
14	.831	.791	.472
16	.909	.870	.551
20	1.067	1.028	.709
24	1.224	1.185	.868
26	1.303	1.264	.945
30	1.461	1.421	1.102
34	1.618	1.579	1.260
36	1.697	1.657	1.339
44	2.012	1.972	1.654
50	2.248	2.209	1.890
60	2.642	2.602	2.283
68	2.957	2.917	2.598

Part No.	A		B		C		D		E			Number of
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2475	5.97	0.235	5.59	0.220					7.44	0.293	G2 - T	10-12-14-16-20-24-26-30-34-36-44-50-60-68

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .025" sq. drawn wire, lead free both ends
Insulation Material:	Glass Filled Nylon 66, UL 94V-0 rated, Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	1 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 30 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC

3648 Evergreen Street, Duarte, Ca 91010 - (626) 301-4200 - fax (626) 301-4212 - e-mail: