


Use this browser's print function to print this entire page, then close this window.

Catalog Page 73-2

Hi Temperature Plastic

2mm	Header	Double Row - Box Stacking	Straight	Surface Mount
-----	--------	---------------------------	----------	---------------

2mm Center, .020" Square Pin, Box, Board Stacking, Double Row Straight SMD Header

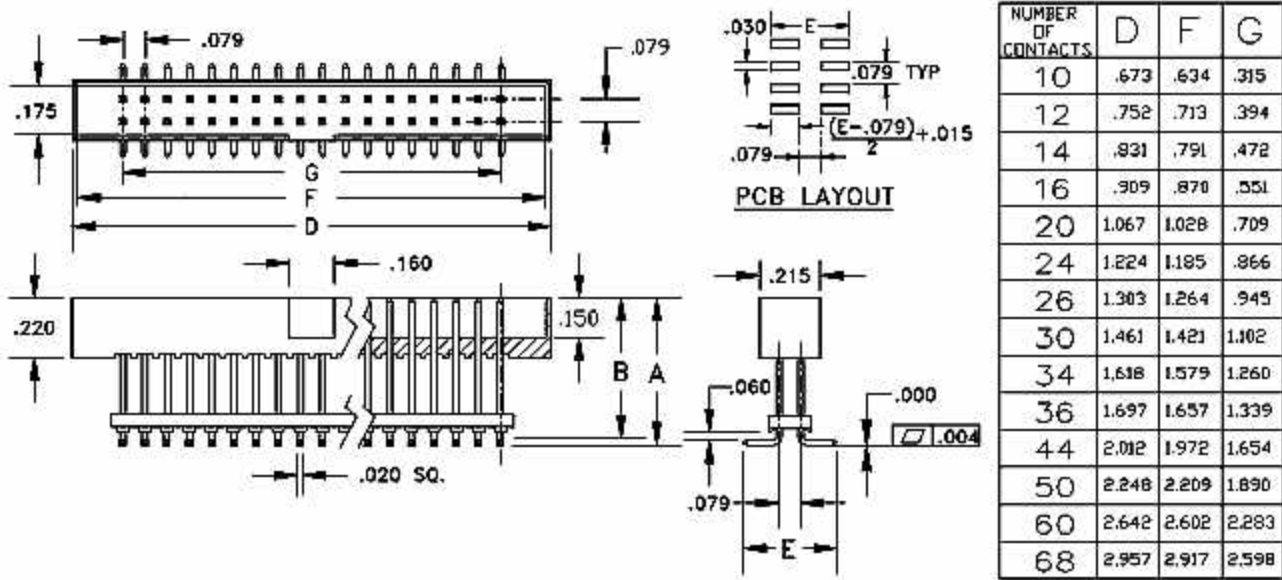

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2421-667/447/260	16.94	0.667	11.35	0.447					6.60	0.260	G2 : T	10:12:14:16:20:24:26:30:34:36:40:44:50
2421-927/707/260	23.55	0.927	17.96	0.707					6.60	0.260	G2 : T	10:12:14:16:20:24:26:30:34:36:40:44:50
2421-1083/863/260	27.51	1.083	21.92	0.863					6.60	0.260	G2 : T	10:12:14:16:20:24:26:30:34:36:40:44:50

Technical Notes

Contact Material:	Pin: Phosphor Bronze, .020" sq, drawn wire, burr free both ends
Insulation Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	2 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: info@commcon.com