


2mm	Header	Double Row - Box	Right Angle	Thru Hole
-----	--------	------------------	-------------	-----------

2mm Center - .020 inch Square Pin - Box - Header - Double Row - Thru Hole

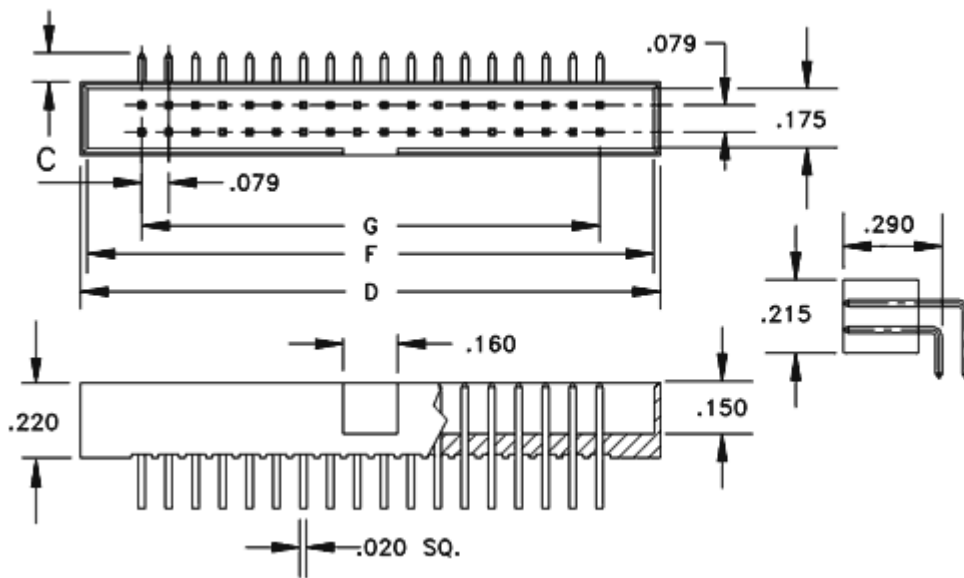

NUMBER OF CONTACTS	D	F	G
10	.673	.634	.315
12	.752	.713	.394
14	.831	.791	.472
16	.909	.870	.551
20	1.067	1.028	.709
24	1.224	1.185	.866
26	1.303	1.264	.945
30	1.461	1.421	1.102
34	1.618	1.579	1.260
36	1.697	1.657	1.339
44	2.012	1.972	1.654
50	2.248	2.209	1.890
60	2.642	2.602	2.283
68	2.957	2.917	2.598

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2401R					1.90	0.075					G2 : T	10:12:14:16:20:24:26:30:34:36:44:50:60:68
2402R					3.94	0.155					G2 : T	10:12:14:16:20:24:26:30:34:36:44:50:60:68

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020 inch sq - drawn wire - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com