


2mm	Header	6 Row .800 inch Stackthrough - screw machine contact	6 Row	Thru Hole
-----	--------	--	-------	-----------

.800 board centerline - 6 Row End of Stack Header

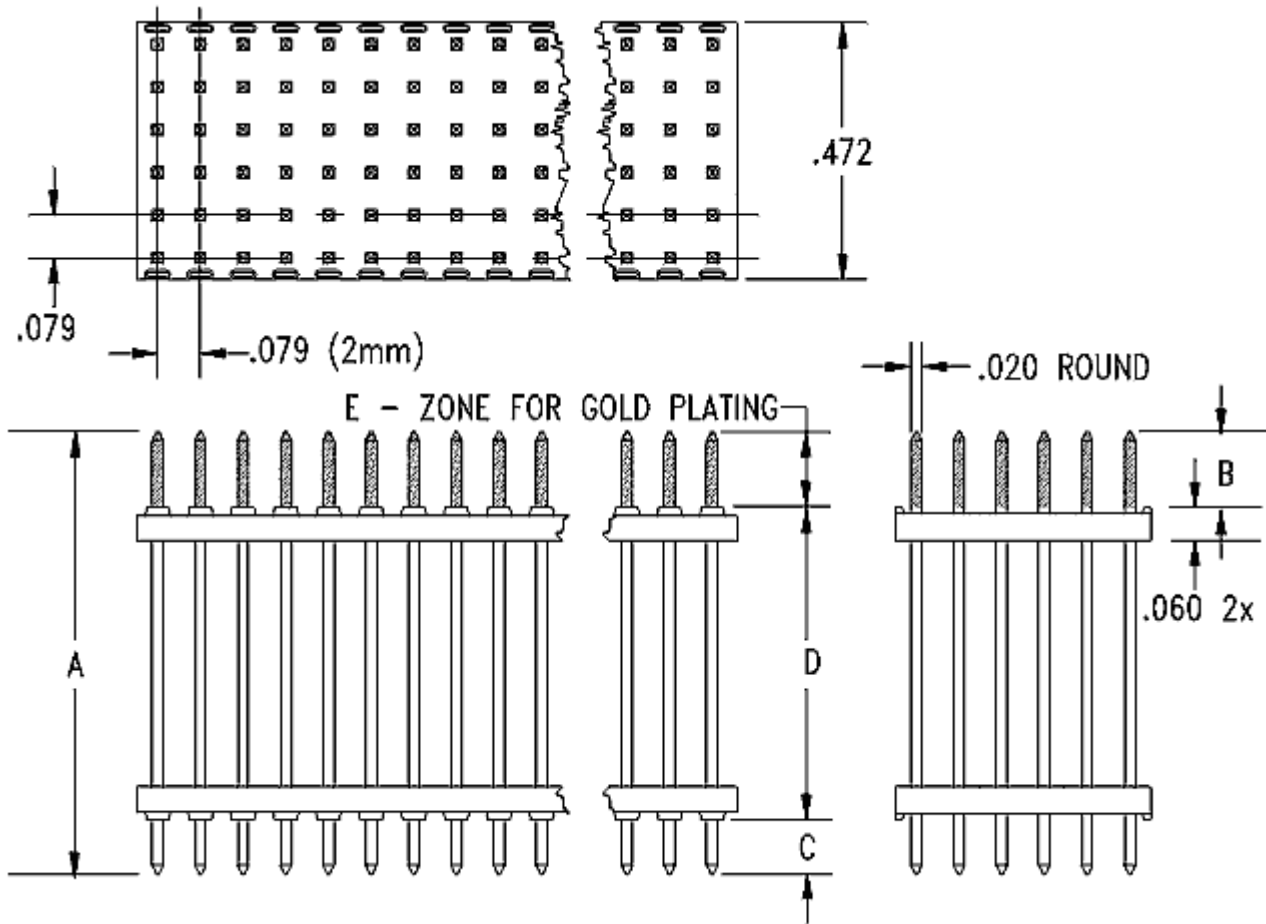

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1295	20.70	0.815	3.56	0.140	2.54	0.100	14.60	0.575	3.56	0.140	G2	150-48

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronz - .020 inch round
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	2 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Compatible

***COMM CON CONNECTORS INC.***

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:

[info@commcon.com](mailto:info@commcon.com)