


Use this browser's print function to print this entire page, then close this window.

Catalog Page 79C-1

Hi Temperature Plastic

2mm	Socket	6 Row .800" Stackthrough	6 Row	Thru Hole
-----	--------	--------------------------	-------	-----------

.800 board centerline - 6 Row Stackthrough

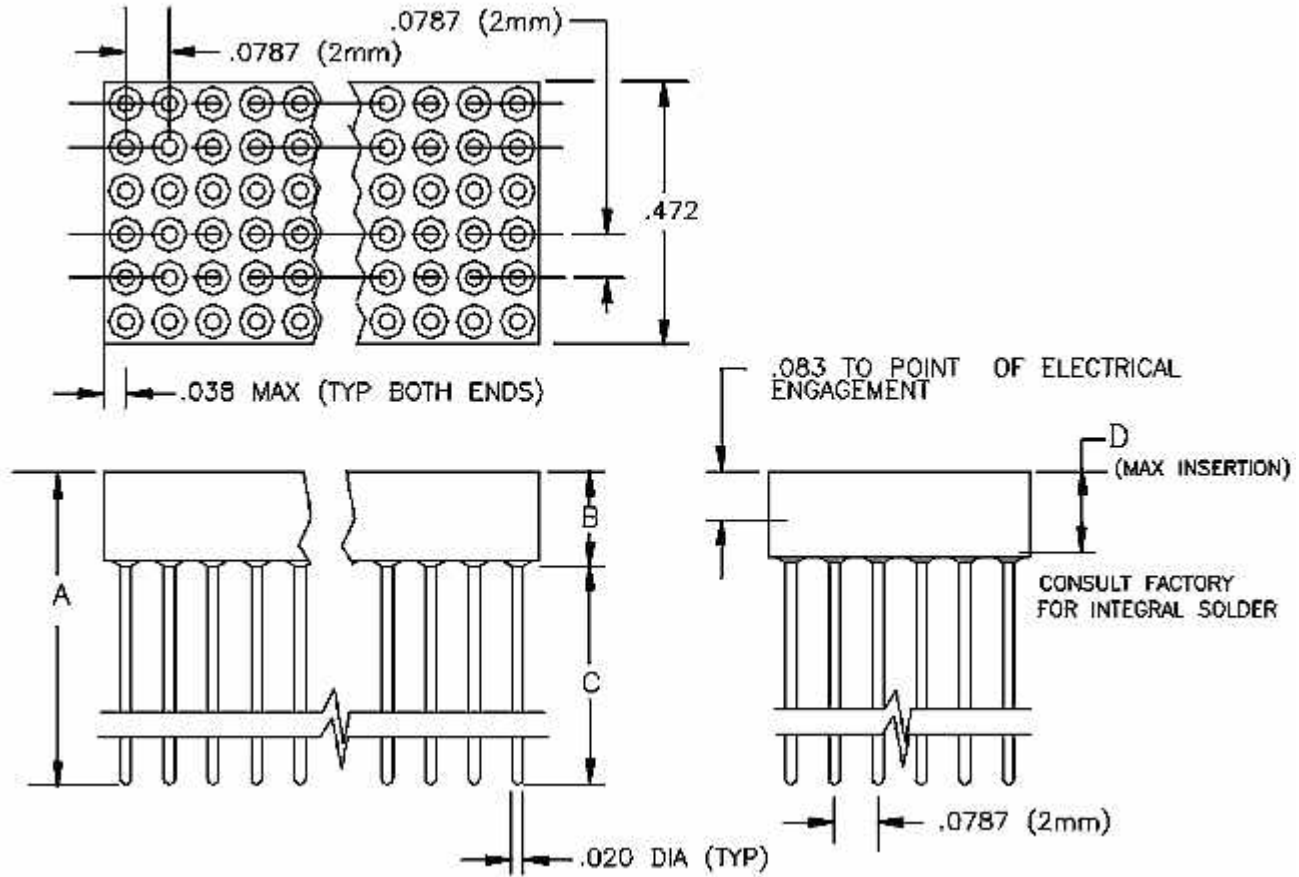

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1292 Stackthrough	23.88	0.940	4.19	0.165	19.68	0.775	3.81	0.150			G	150-48

Technical Notes

Contact Material:	Shell: Phosphor Bronz, Contact Clip: 6 finger BeCu [#43]
Insulate Material:	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
Temperature Range:	-65—C to +250—C
Insulation Resistance:	5,000 MegOhm @ 500VDC
Current Rating:	3 amp continuous @ 100 VDC/contact
Max Processing Temperature:	250—C for 60 seconds
Insertion Force:	typ initial: 52 grams(1.8oz) w/.020" rd pin & 73 grams(2.6oz) w/.020sq pin [#43]
Extraction Force:	typ initial: 32 grams(1.1oz) w/.020" rd pin & 51 grams(1.8oz) w/.020sq pin [#43]
Heat Deflection:	260—C @ 264 PSI per ASTM D648

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: info@commcon.com