


2mm	Socket	6 Row .800 inch Non-Stackthrough - screw machine contact	6 Row	Thru Hole
-----	--------	--	-------	-----------

.800 board centerline - 6 Row Screw Machine Contacts Hi Rel Round pins Low Profile

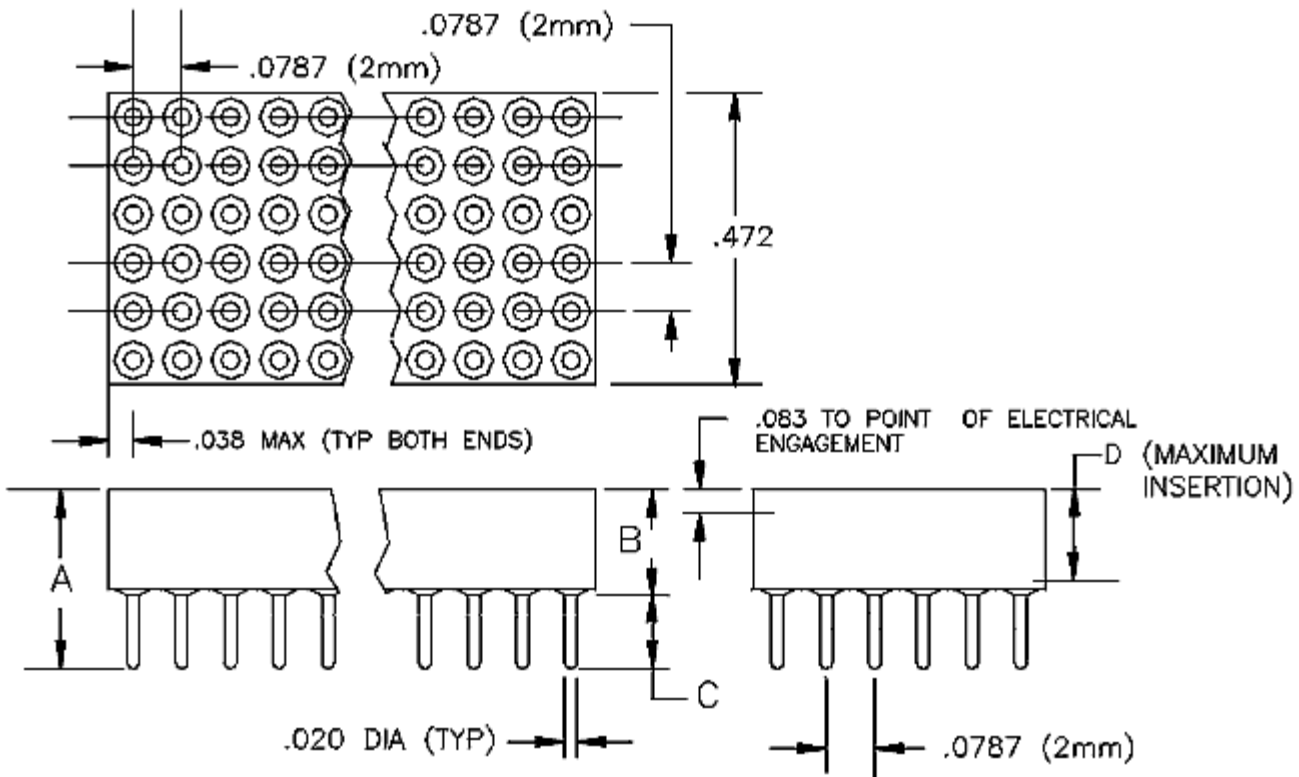

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1291 Non-Stack	7.37	0.290	4.19	0.165	3.18	0.125	3.81	0.150			G2	150-48

Technical Notes	
Contact Material:	Shell: Phosphor Bronz - Contact Clip: 6 finger BeCu [#43]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	typ initial: 52 grams(1.8oz) w/.020 inch rd pin & 73 grams(2.6oz) w/.020sq pin [#43]
Extraction Force:	typ initial: 32 grams(1.1oz) w/.020 inch rd pin & 51 grams(1.8oz) w/.020sq pin [#43]
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com