


2mm	Socket	"4 Row Stacking Socket - Screw Machine Contact, Round pin"	4 Row	Thru Hole
-----	--------	--	-------	-----------

Screw Machine Contact version of the PC104Plus Connectors - 120 position - 4Row

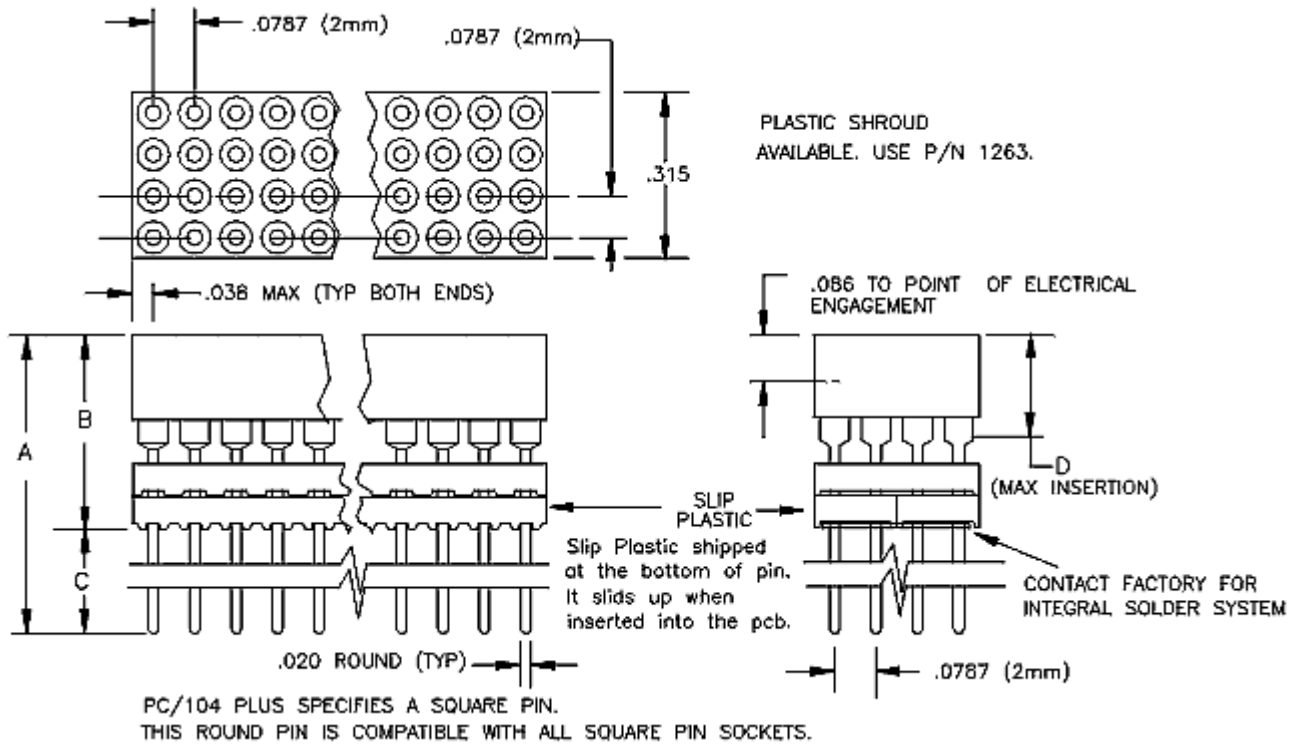

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1264-120 Shroud only											X	Plastic only
1261 Non-Stack	11.68	0.460	9.35	0.368	2.34	0.092	5.08	0.200			G2	120-16
1262 Stackthrough	21.34	0.840	9.35	0.368	11.99	0.472	5.08	0.200			G	120-16

Technical Notes	
Contact Material:	Shell: Phosphor Bronz - Contact Clip: 6 finger BeCu [#32]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial per: 160 grams (5.6oz) w/.020 inch rd pin & 209 grams (7.4oz) w/.020sq pin [#32]

Extraction Force:	typ initial per: 97 grams(3.4oz) w/.020 inch rd pin & 116 grams(4.1oz) w/.020sq pin [#32]
Plastic:	High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com