


2mm	Socket	6 Row .800 inch Stackthrough & Non-Stack	6 Row	Thru Hole
-----	--------	--	-------	-----------

.800 board centerline - 6 Row Stackthrough & Non-Stackthrough

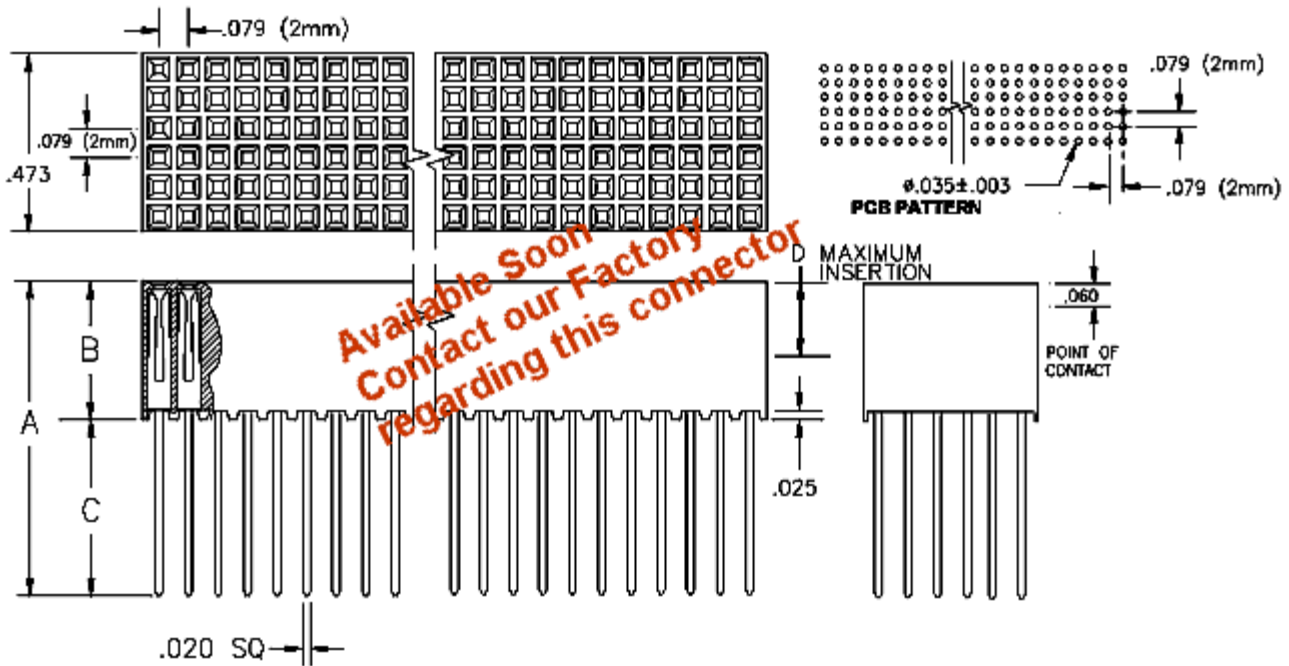

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1293</b> Non-Stack	11.68	0.460	9.35	0.368	2.34	0.092	6.35	0.250			G2	150-48
<b>1294</b> Stackthrough	24.84	0.978	9.35	0.368	15.49	0.610	6.35	0.250			G	150-48

Technical Notes	
<b>Contact Material:</b>	Phosphor Bronz - Ultra Low Insertion Force contact design
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	Typ initial per: 60 grams (2.1 oz) w/.020 inch square pin
<b>Extraction Force:</b>	typ initial per: 40 grams(1.4 oz) w/.020 inch square pin
<b>Plastic:</b>	High Temperature Compatible

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)