


Use this browser's print function to print this entire page, then close this window.

Catalog Page 81-1

Hi Temperature Plastic

2mm	Socket	Single Row - Screw Machine Socket	Straight	Surface Mount
-----	--------	-----------------------------------	----------	---------------

2mm Center, Single Row Straight, Screw Machine SMD Socket

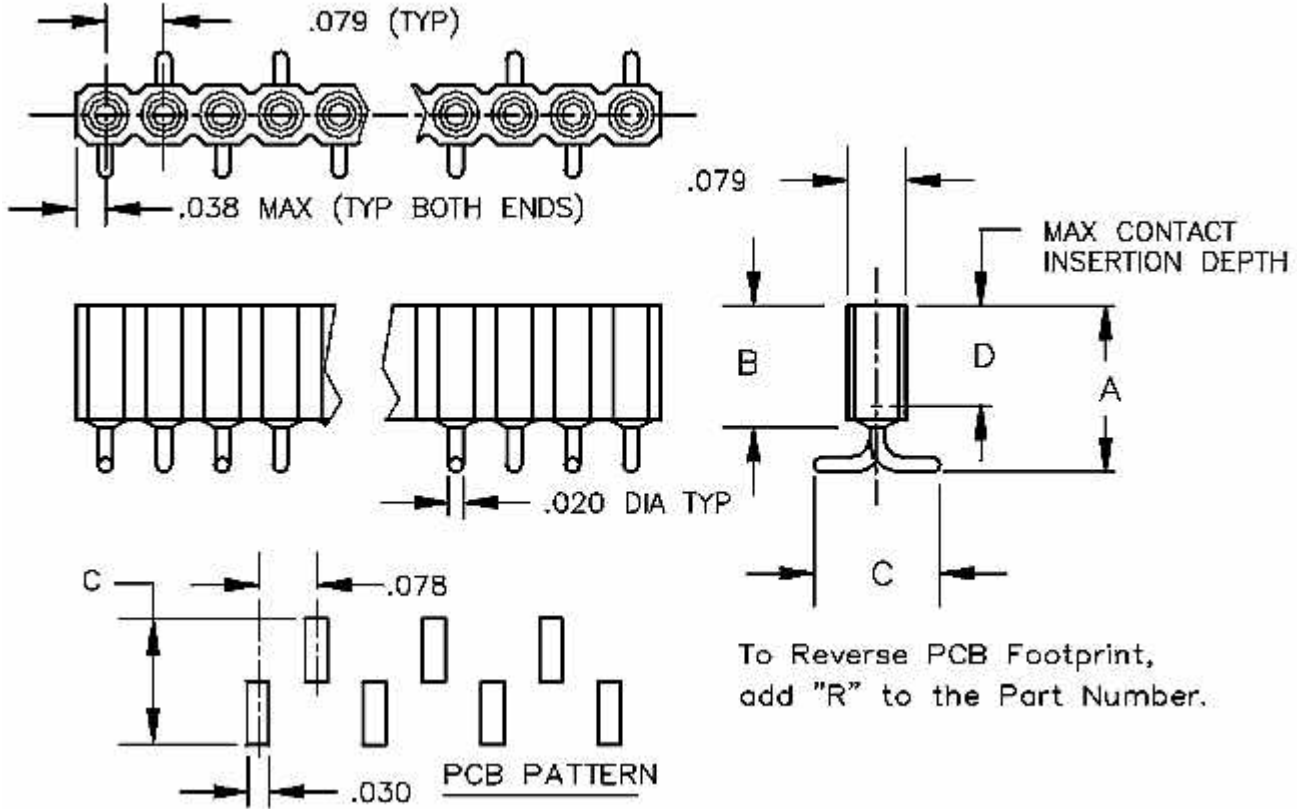

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1357 1357R	5.84	0.230	4.06	0.160	4.06	0.160	3.81	0.150			G2 : T	4-15

**Technical Notes**

<b>Contact Material:</b>	Shell: Phosphor Bronz, Contact Clip: 6 finger BeCu [#43]
<b>Insulate Material:</b>	Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
<b>Temperature Range:</b>	-65°C to +250°C
<b>Insulation Resistance:</b>	5,000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amp continuous @ 100 VDC/contact
<b>Max Processing Temperature:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	typ initial: 52 grams(1.8oz) w/.020" round pin & 73 grams(2.6oz) w/.020 sq pin [#43]
<b>Extraction Force:</b>	typ initial: 32 grams(1.1oz) w/.020" rd pin & 51 grams(1.8oz) w/.020sq pin [#43]
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648

**COMM CON CONNECTORS INC.**

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail: [info@commcon.com](mailto:info@commcon.com)