


2mm	Socket	Double Row - Press Fit	Straight	Thru Hole
-----	--------	------------------------	----------	-----------

2mm Center - Double Row Straight - Press Fit Socket

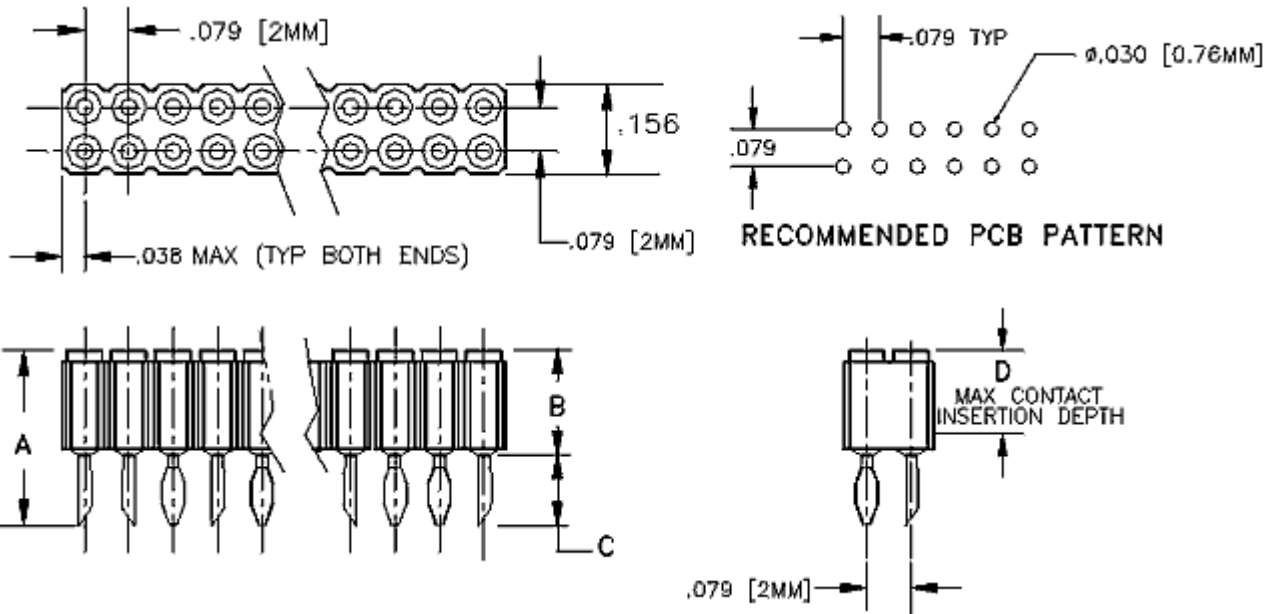

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1250C</b> 2 row	8.00	0.315	4.57	0.180	3.43	0.135	3.81	0.150			G1	4-80

Technical Notes	
<b>Contact Material:</b>	Shell: Phosphor Bronz - Contact Clip: BeCu spring
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amp continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	typ initial: 175 grams(6.2oz) w/.020 inch round pin & 143 grams(5.0oz) w/.018 rd pin
<b>Extraction Force:</b>	typ initial: 103 grams(3.6oz) w/.020 inch round pin & 84 grams(3.0oz) w/.018 rd pin
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)