


1mm	Header	Double Row - with stacking option	Straight	Thru Hole
-----	--------	-----------------------------------	----------	-----------

1mm Center .012 inch Square Pin - Double Row Straight Header - with stacking option

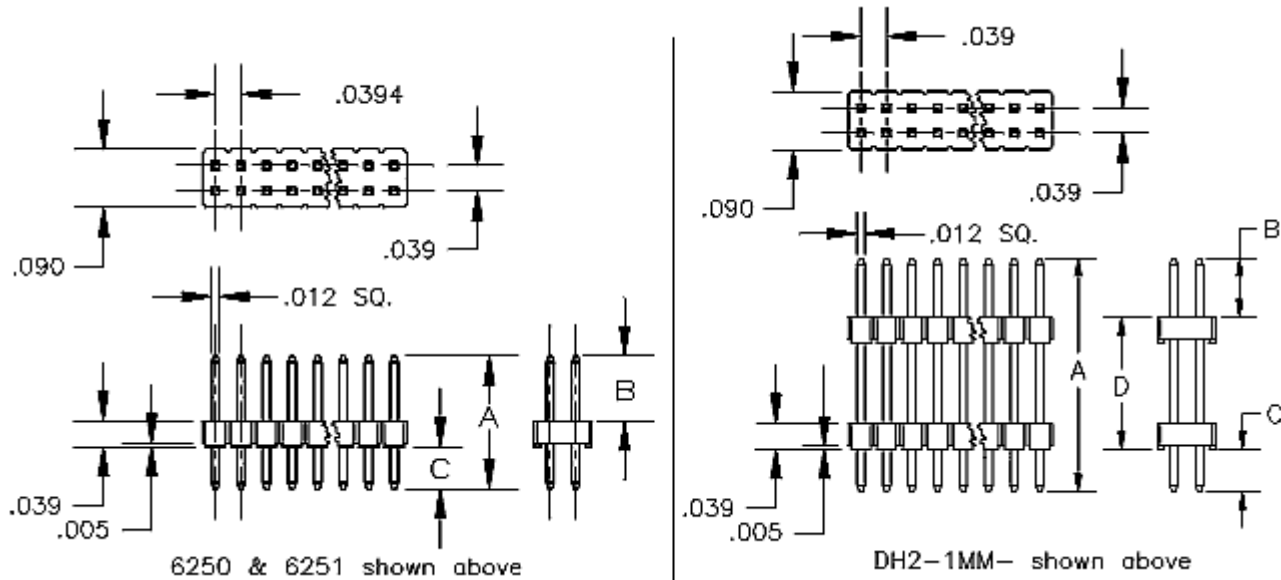

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
6250	5.33	0.210	2.79	0.110	1.52	0.060					G1 : T	4-80
6251	6.35	0.250	2.79	0.110	2.54	0.100					G1 : T	4-80
DH2-1MM-070/250/070 2 insulators	9.91	0.390	1.78	0.070	1.78	0.070	6.35	0.250			G1 : T	4-80
DH2-1MM-070/300/070 2 insulators	11.18	0.440	1.78	0.070	1.78	0.070	7.62	0.300			G1 : T	4-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .012 inch sq - drawn wire - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amp continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Compatible

1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:
info@commcon.com