


.100	Header	Double Row - High Profile	Rt Angle	Thru Hole
------	--------	---------------------------	----------	-----------

.100 inch Center - .025 inch Square Pin - High Profile - Double Row Right Angle Header

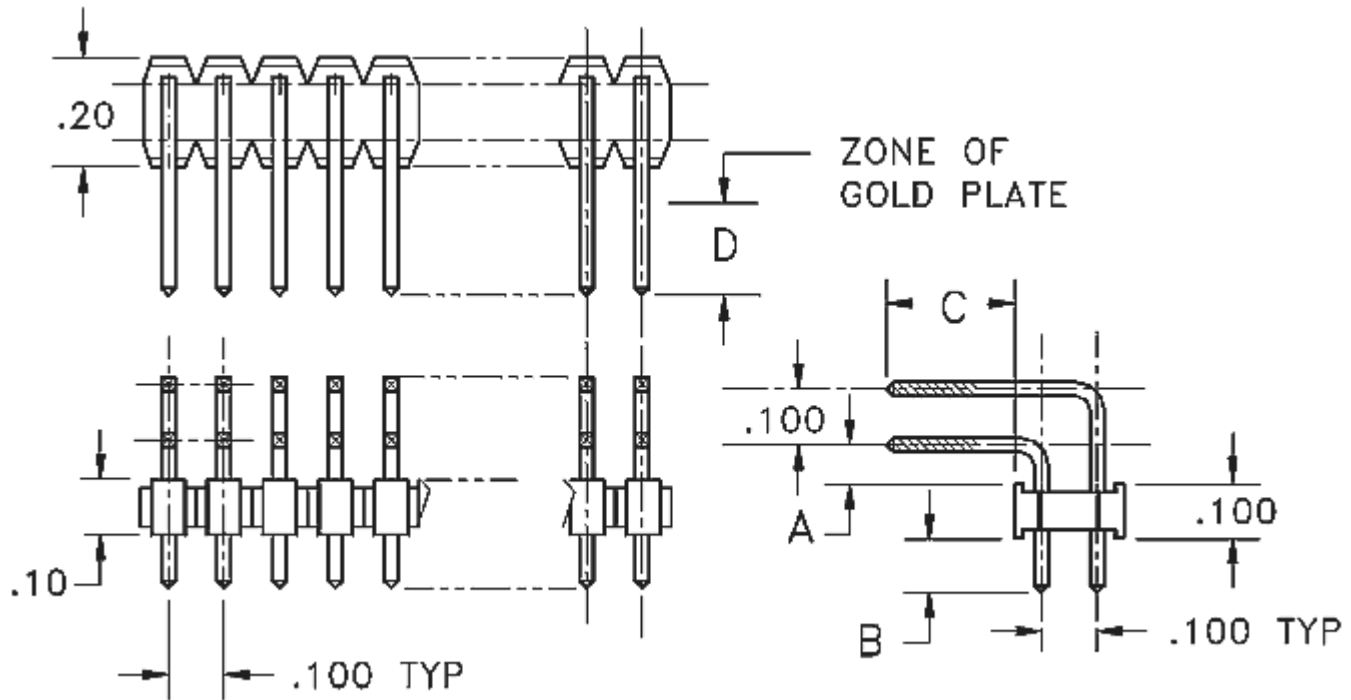

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
4720R	1.52	0.060	3.05	0.120	5.84	0.230	5.84	0.230			G2 : G1 : T	4-80
4721R	1.52	0.060	3.30	0.130	8.08	0.318	5.84	0.230			G2 : G1 : T	4-80
4722R	1.52	0.060	3.30	0.130	10.67	0.420	5.84	0.230			G2 : G1 : T	4-80

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Compatible

**COMM CON CONNECTORS INC.**  
 1848 Evergreen Street, Duarte, Ca 91010 · (626) 301-4200 · fax (626) 301-4212 · e-mail:  
[info@commcon.com](mailto:info@commcon.com)