
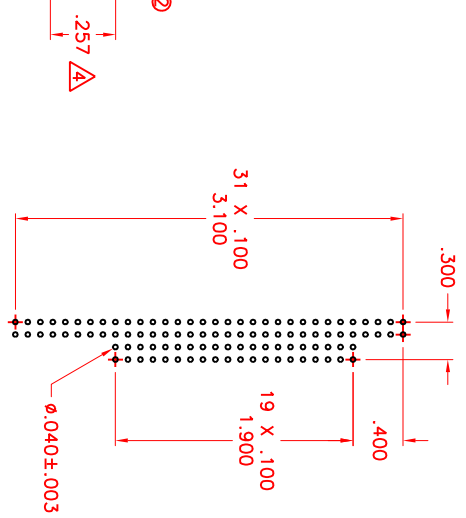


THIS DRAWING IS THE PROPERTY OF PHOSPHOR BRONZE CORPORATION. IT IS TO BE USED ONLY FOR THE PROJECT AND QUANTITY SPECIFIED HEREON. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF PHOSPHOR BRONZE CORPORATION.

REVISIONS		DATE	APPROVED
ECO NO:	REV:	DESCRIPTION	
91XXX C	REVISED	07.11.06	

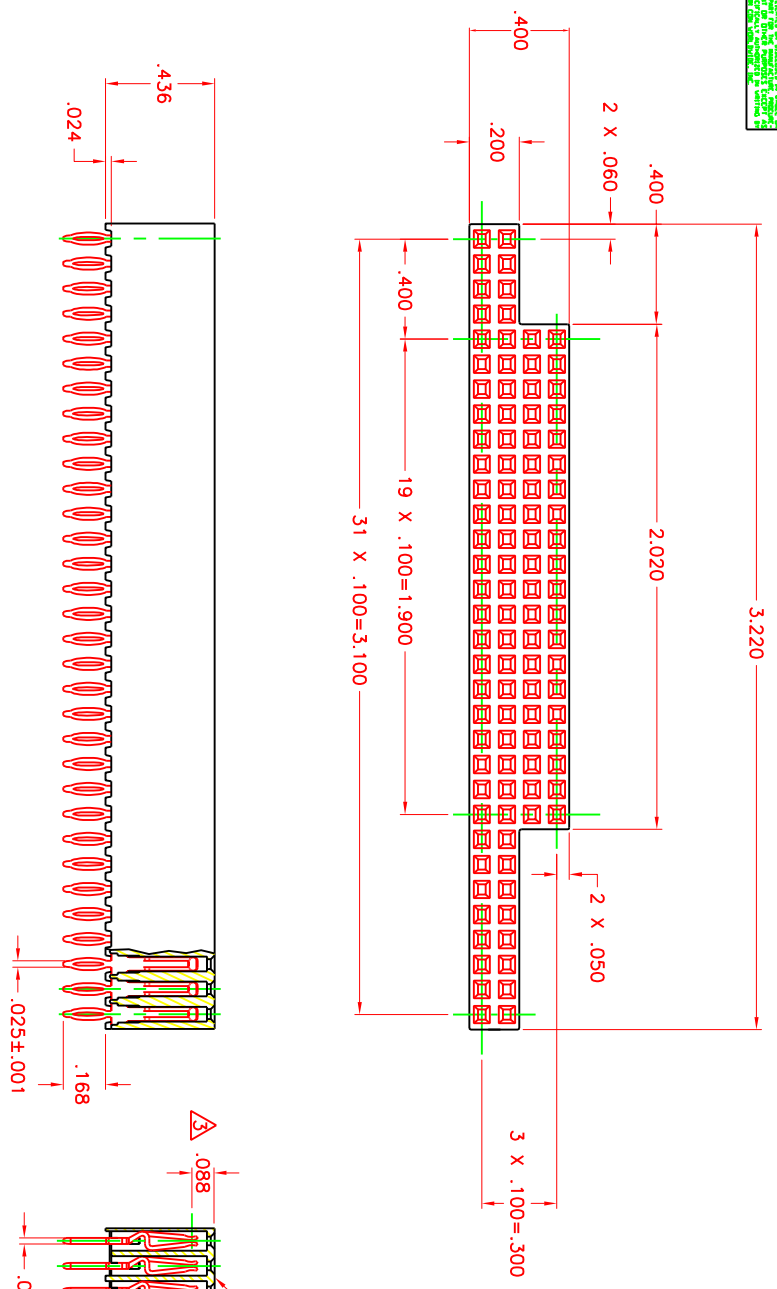

- ④ MAXIMUM INSERTION DEPTH.
 - ③ POINT OF FULL ELECTRICAL ENGAGEMENT.
2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000.
INSULATOR - THERMOPLASTIC, 94V-0, BLK.
Rohs COMPLIANT

1. FINISH: G2LF - GOLD PLATE PER MIL-G-45204, TYPE II, .000010 MIN. ON ENGAGEMENT END, AND PURE BRIGHT TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	1	40467	INSULATOR, PC/104 SOCKET
1	104	40705-02	CONTACT, SOCKET, .100 PITCH, C=.506

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED:	COMM CON WORLDWIDE, INC.
DIMENSIONS ARE IN INCHES	a subsidiary of
FRACTIONS DECIMALS ANGLES	INTERCONNECT SYSTEMS INC.
Ø 1/64 .XXX ± .010 ± 1"	TITLE
ORDER BY: AM DATE: 5.04	CONNECTOR, SOCKET, PRESS FIT
APPROVED: DATE: 5.04	PC/104, NON STACK THROUGH
DRAWING: SEE NOTE 2 CAT. NO: 1184CPF-104G	SIZE/DWG. NO: 30XXX
FINISH: SEE NOTE 1 SCALE: 2:1	REV: B
	TOOL. NO:
	SHEET 1 OF 1