


Use this browser's print function to print this entire page, then close this window.

Catalog Page 70-1

High Temperature Compatible

2mm Header Single Row Rt Angle Surface Mount

2mm Center, .020" Square Pin, Single Row Right Angle SMD Header

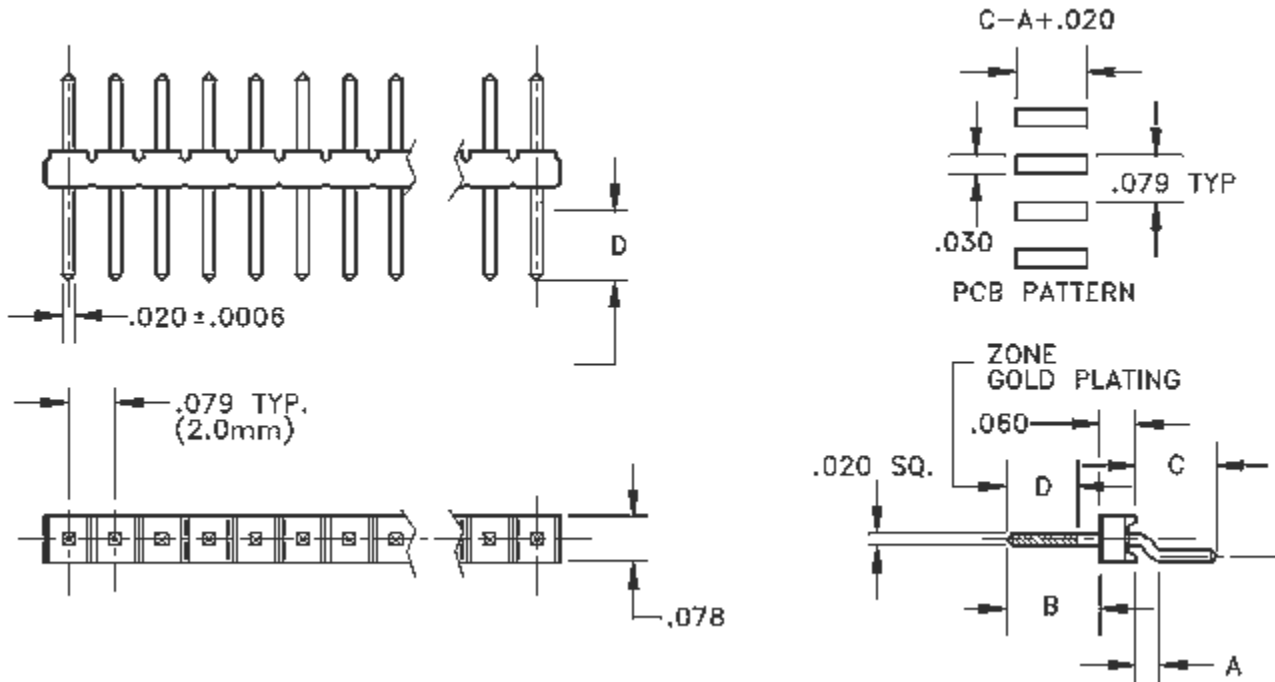

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
HTSM2301R	1.27	0.050	3.48	0.137	3.30	0.130	3.48	0.137			T : G2	2-15
HTSM2302R	1.27	0.050	3.99	0.157	3.30	0.130	3.56	0.140			T : G2	2-15

Technical Notes

- Contact Material:** Pin: Phosphor Bronze, .020" sq, drawn wire, burr free both ends
- Insulation Material:** Glass Filled Nylon 46, UL 94V-0 rated, Black (std)
- Heat Deflection:** 260°C @ 264 PSI per ASTM D648
- Insulation Resistance:** 5,000 MegOhm @ 500VDC
- Current Rating:** 2 amp continuous @ 100 VDC/contact
- Max Processing Temp:** 250°C for 60 seconds
- Plastic:** High Temperature Compatible

COMM CON CONNECTORS INC.

1848 Evergreen Street, Duarte, Ca 91010 (626) 301-4200 fax (626) 301-4212 e-mail: info@commcon.com